

GONIOPHOTOMETERS SYSTEM TEST REPORT

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2367.4 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	59.7V x 59.3H
	At 50% of Imax	33.3V x 34.0H
	At 90% of Imax	13.7V x 14.3H

Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	813.3 lumens per klm.
	To 50% of Imax	489.6 lumens per klm.
	To 90% of Imax	102.1 lumens per klm.

Upward LOR	1.5 %
Downward LOR	98.5 %

Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.7DEG
Operators:/
Test Date:2022-08-29

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity:60.5%
Test Distance:12.040m [K=1.0000]
Remarks:

GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.1V I:0.2849A P:60.723W PF:0.9681 Freq:49.99Hz Lamp Flux:577.015x12 lm		
NAME: LED 地埋灯	TYPE:SL2150CE-12	WEIGHT:/
SPEC.:60W AC220V 4000K	DIM.: 0.33*0.33*0.26	SERIAL No.:/
MFR.: /	SUR.:0.23*0.23	Shielding Angle:/

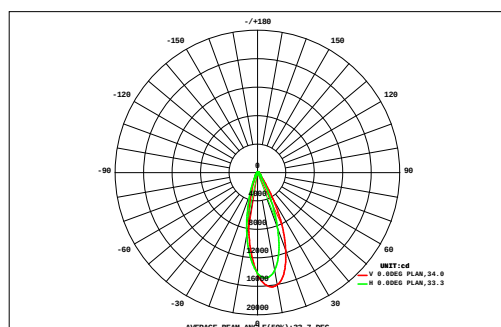

DATA OF LAMP		Eff:114.03lm/W	
MODEL	/	Imax(cd)	16393
NOMINAL POWER(W)	/	AVAILABILITY(%)	81.6
RATED VOLTAGE(V)	/	Avai. FLUX(lm)	5648
NOMINAL FLUX(lm)	577.015	LOR(%)	100.0
LAMPS INSIDE	12	TOTAL FLUX(lm)	6924
TEST VOLTAGE(V)	/	q @50%(H,V)	34,33DEG

45 40 35 30 25 20 15 10 5 0 -5 -10 -15 -20 -25 -30 -35 -40 -45	AREA FLUX DIAGRAM																UNIT: lm				F t	F a
	1.14	1.52	1.89	2.22	2.52	2.80	3.00	3.09	3.09	3.06	2.98	2.84	2.57	2.19	1.74	1.32	0.97	0.68	39.6	0.00		
	1.42	1.86	2.28	2.69	3.17	3.58	3.78	3.90	3.92	3.85	3.71	3.47	3.16	2.82	2.35	1.82	1.29	0.89	49.9	0.00		
	1.67	2.20	2.79	3.55	4.41	5.15	5.62	5.89	5.81	5.54	5.05	4.30	3.68	3.26	2.85	2.31	1.70	1.11	66.9	0.00		
	1.95	2.67	3.71	5.14	6.97	8.80	10.2	10.6	10.0	8.91	7.35	5.71	4.46	3.70	3.22	2.70	2.08	1.41	99.6	7.34		
	2.28	3.45	5.23	8.26	12.5	16.7	19.8	20.5	19.1	15.8	11.8	8.45	5.97	4.47	3.58	2.98	2.39	1.70	165	105		
	2.74	4.62	7.86	13.7	22.0	30.5	36.6	38.6	35.7	28.7	20.4	13.4	8.51	5.59	3.97	3.19	2.62	1.93	281	233		
	3.27	6.04	11.5	21.9	35.7	50.0	60.6	64.3	59.6	48.1	33.7	21.0	12.1	7.12	4.64	3.42	2.78	2.09	448	410		
	3.82	7.50	15.7	31.1	51.4	71.4	86.2	91.6	85.8	70.2	49.3	29.9	16.5	8.94	5.31	3.64	2.90	2.22	634	600		
	4.31	8.85	19.6	39.4	64.4	88.8	107	114	108	88.2	62.8	38.2	20.6	10.6	6.02	3.97	3.03	2.32	790	759		
	4.49	9.37	21.2	43.0	70.0	95.5	114	121	117	100	72.7	44.5	23.7	12.0	6.62	4.27	3.10	2.33	865	836		
	4.33	8.90	19.9	40.5	67.7	93.8	113	121	117	99.3	71.9	44.0	23.4	11.9	6.63	4.30	3.05	2.26	853	822		
	3.98	7.95	17.0	34.2	59.6	83.7	101	109	104	87.4	62.5	37.9	20.3	10.6	5.98	3.89	2.85	2.15	755	723		
	3.48	6.63	13.4	25.7	44.4	65.0	79.9	85.9	81.4	66.9	47.2	28.7	15.8	8.59	5.14	3.49	2.64	1.99	586	552		
	2.93	5.23	9.73	17.2	28.5	43.0	53.8	58.5	54.3	44.0	31.1	19.3	11.3	6.56	4.24	3.09	2.44	1.80	397	358		
	2.37	3.89	6.50	10.7	16.7	23.9	30.3	33.1	30.9	25.3	18.2	11.9	7.47	4.91	3.52	2.78	2.20	1.59	236	188		
	1.90	2.82	4.27	6.38	9.06	12.0	14.8	15.9	15.2	12.9	9.86	7.16	5.12	3.83	3.03	2.47	1.90	1.37	130	55.0		
	1.54	2.13	2.97	4.05	5.18	6.35	7.44	7.92	7.66	6.74	5.53	4.52	3.69	3.07	2.58	2.09	1.59	1.11	76.2	0.00		
	1.26	1.67	2.18	2.76	3.31	3.83	4.25	4.39	4.38	4.09	3.63	3.23	2.87	2.51	2.12	1.68	1.23	0.83	50.2	0.00		
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL(DEG)				10	15	20	25	30	35	40	45		
F t	48.9	87.3	168	312	508	705	852	909	863	720	520	328	191	113	73.5	53.4	40.8	29.8	6521	---		
F a	0.00	14.0	117	270	470	669	817	874	827	681	476	278	131	24.0	0.00	0.00	0.00	0.00	---	5648		

one-half-peak spread: U:17.4,D:16.2 , L:18.2,R:16.1 NEMA Beam Type: Type 4


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.7DEG
Operators:/
Test Date:2022-08-29

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity:60.5%
Test Distance:12.040m [K=1.0000]
Remarks:

GONIOPHOTOMETERS SYSTEM TEST REPORT

ISOCANDELA DIAGRAM

Test:U:220.1V I:0.2849A P:60.723W PF:0.9681 Freq:49.99Hz Lamp Flux:577.015x12 lm		
NAME: LED 地埋灯	TYPE:SL2150CE-12	WEIGHT:/
SPEC.:60W AC220V 4000K	DIM.: 0.33*0.33*0.26	SERIAL No.:/
MFR.: /	SUR.:0.23*0.23	Shielding Angle:/

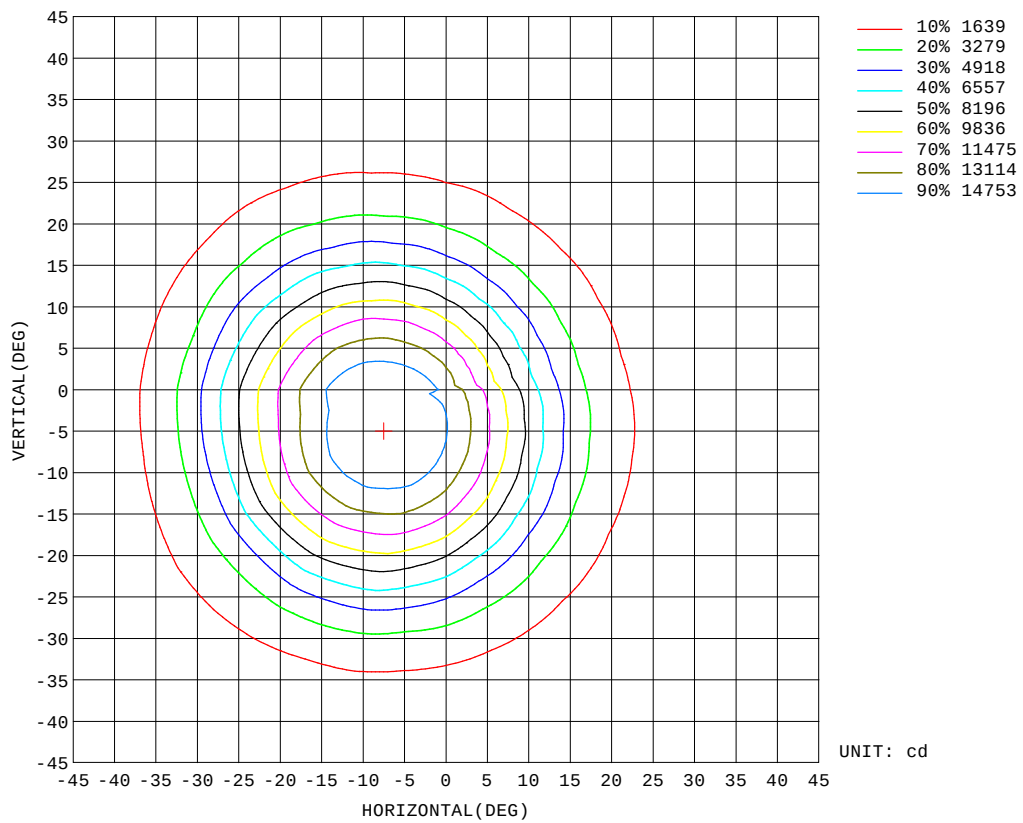


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.7DEG
Operators:/
Test Date:2022-08-29

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity:60.5%
Test Distance:12.040m [K=1.0000]
Remarks:

GONIOPHOTOMETERS SYSTEM TEST REPORT

ISOLUX DIAGRAM

Test:U:220.1V I:0.2849A P:60.723W PF:0.9681 Freq:49.99Hz Lamp Flux:577.015x12 lm		
NAME: LED 地埋灯	TYPE:SL2150CE-12	WEIGHT:/
SPEC.:60W AC220V 4000K	DIM.: 0.33*0.33*0.26	SERIAL No.:/
MFR.: /	SUR.:0.23*0.23	Shielding Angle:/

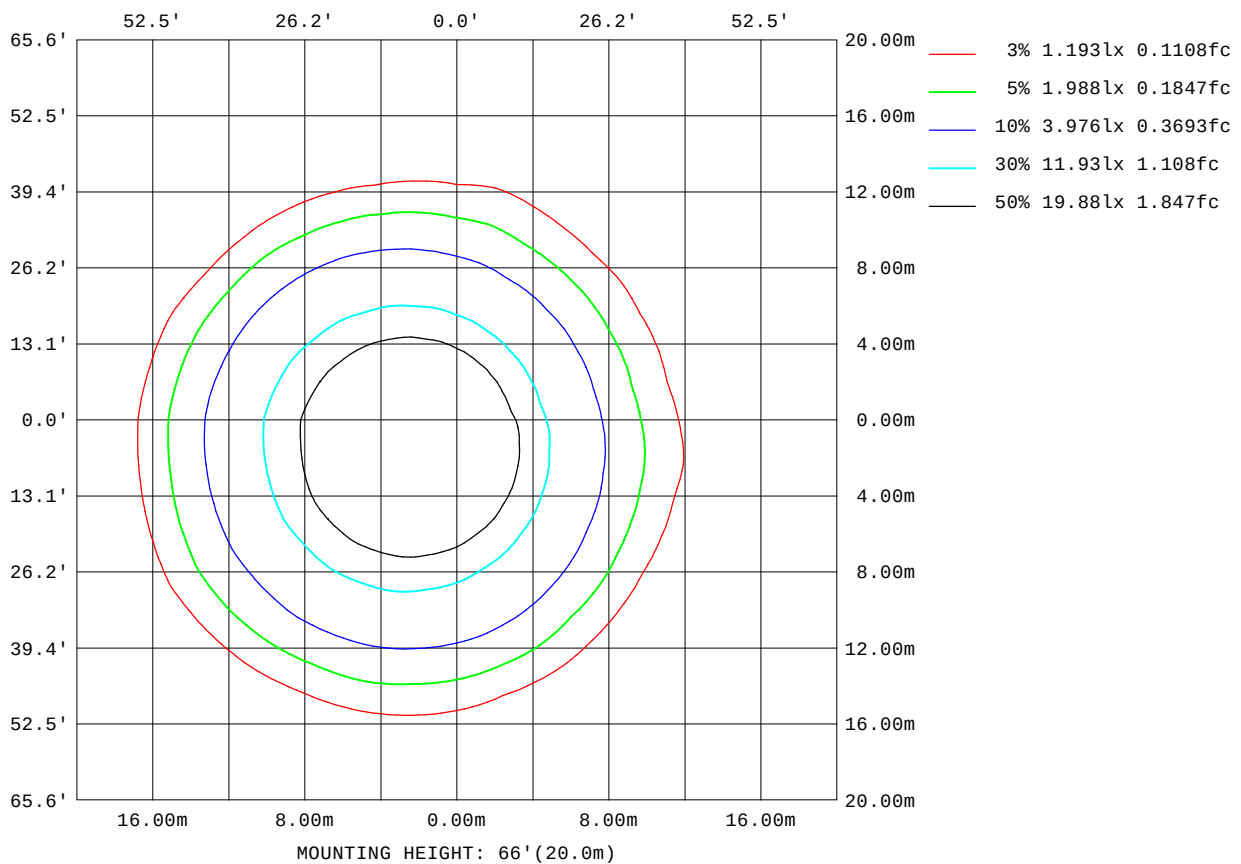


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.7DEG
Operators: /
Test Date: 2022-08-29

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity: 60.5%
Test Distance: 12.040m [K=1.0000]
Remarks:

GONIOPHOTOMETERS SYSTEM TEST REPORT

Planar Illuminance Curve

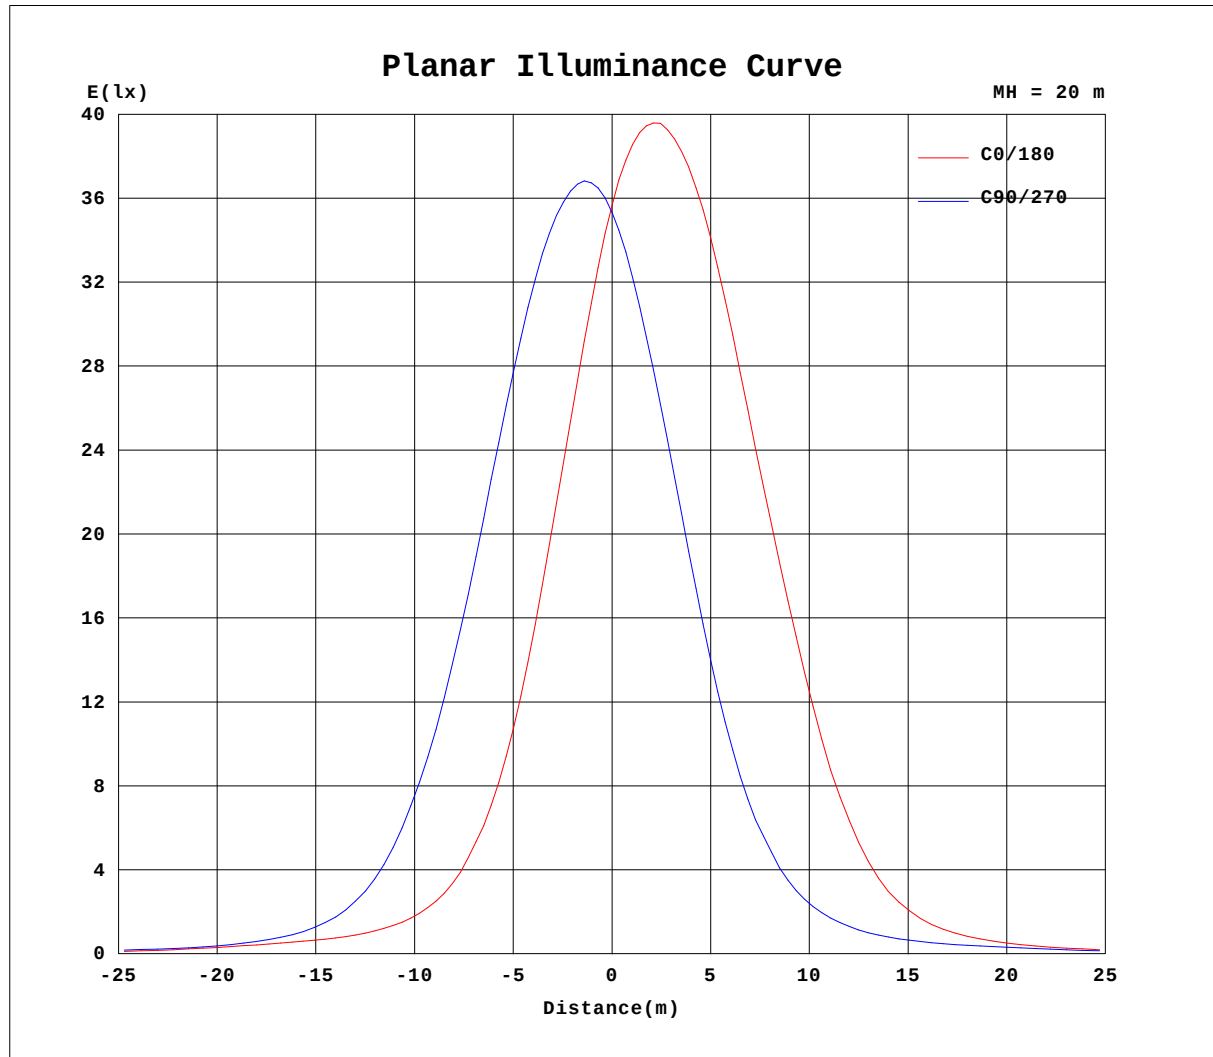

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.7DEG
Operators: /
Test Date: 2022-08-29


g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity: 60.5%
Test Distance: 12.040m [K=1.0000]
Remarks:

GONIOPHOTOMETERS SYSTEM TEST REPORT

AAI Figure

Test:U:220.1V I:0.2849A P:60.723W PF:0.9681 Freq:49.99Hz Lamp Flux:577.015x12 lm		
NAME: LED 地埋灯	TYPE:SL2150CE-12	WEIGHT:/
SPEC.:60W AC220V 4000K	DIM.: 0.33*0.33*0.26	SERIAL No.:/
MFR.: /	SUR.:0.23*0.23	Shielding Angle:/

Flux out:2912 lm

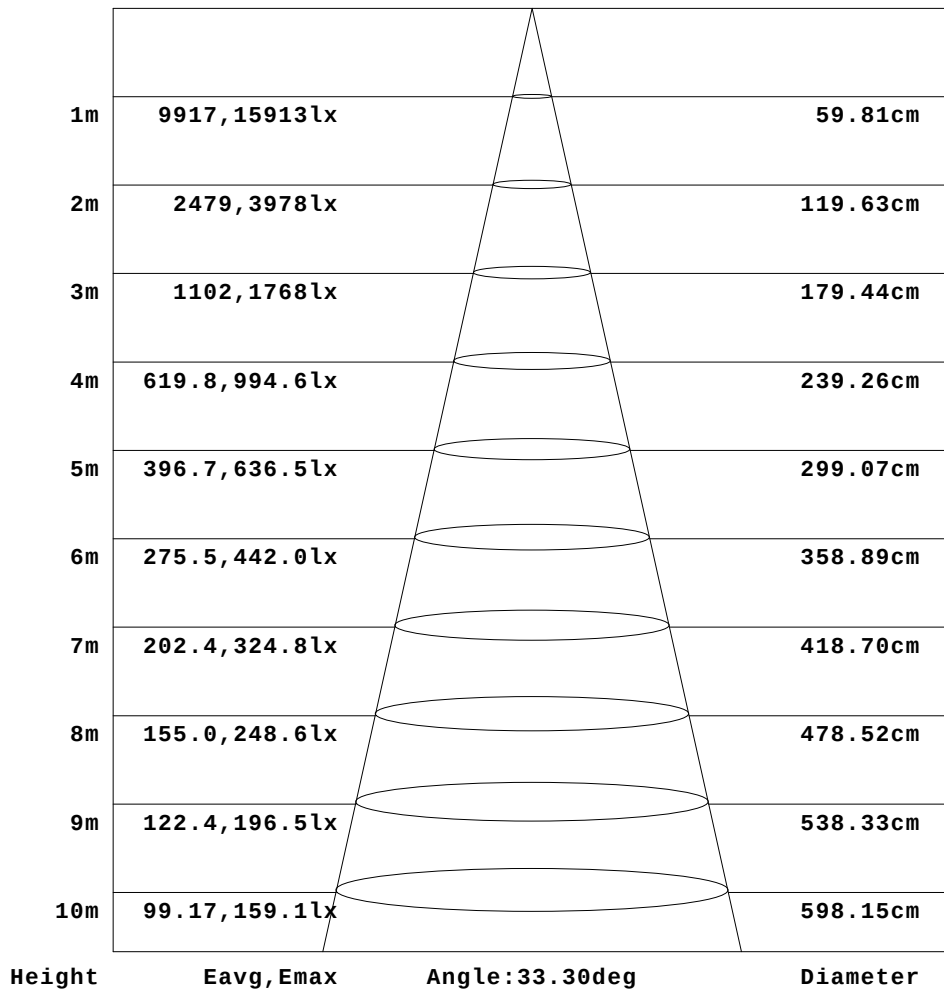

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.7DEG
Operators:/
Test Date:2022-08-29

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity:60.5%
Test Distance:12.040m [K=1.0000]
Remarks:

GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.1V I:0.2849A P:60.723W PF:0.9681 Freq:49.99Hz Lamp Flux:577.015x12 lm		
NAME: LED 地埋灯	TYPE:SL2150CE-12	WEIGHT:/
SPEC.:60W AC220V 4000K	DIM.: 0.33*0.33*0.26	SERIAL No.:/
MFR.: /	SUR.:0.23*0.23	Shielding Angle:/

Table--1

UNIT: ×10cd

H(DEC) V(DEC)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.06	0.07	0.08	0.11	0.14	0.19	0.26	0.35	0.50	0.72	1.06	1.58	2.32	3.31	4.50	5.67	6.61	7.20	7.43
-170	0.06	0.07	0.10	0.14	0.19	0.27	0.40	0.63	1.04	1.66	2.31	3.01	3.69	4.31	4.82	5.18	5.42	5.58	5.79
-160	0.06	0.08	0.11	0.16	0.22	0.32	0.46	0.65	0.96	1.37	1.90	2.48	3.09	3.70	4.23	4.67	5.00	5.21	5.33
-150	0.06	0.08	0.12	0.17	0.24	0.30	0.38	0.52	0.72	1.00	1.36	1.80	2.28	2.76	3.23	3.66	4.01	4.28	4.47
-140	0.06	0.09	0.13	0.18	0.22	0.26	0.31	0.39	0.50	0.66	0.87	1.13	1.41	1.74	2.07	2.38	2.66	2.91	3.07
-130	0.06	0.09	0.13	0.16	0.19	0.22	0.26	0.30	0.35	0.43	0.52	0.63	0.76	0.92	1.09	1.25	1.42	1.56	1.67
-120	0.06	0.09	0.12	0.15	0.16	0.18	0.21	0.23	0.26	0.29	0.32	0.36	0.41	0.46	0.51	0.57	0.63	0.69	0.73
-110	0.06	0.09	0.12	0.13	0.14	0.15	0.17	0.18	0.19	0.21	0.22	0.24	0.25	0.26	0.28	0.29	0.31	0.32	0.33
-100	0.06	0.09	0.11	0.12	0.12	0.12	0.13	0.14	0.14	0.15	0.16	0.16	0.16	0.17	0.18	0.18	0.18	0.18	0.19
-90	0.06	0.09	0.11	0.11	0.11	0.11	0.11	0.11	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12
-80	0.06	0.10	0.13	0.15	0.17	0.19	0.21	0.23	0.26	0.29	0.33	0.35	0.38	0.41	0.43	0.45	0.45	0.47	0.48
-70	0.06	0.11	0.17	0.21	0.27	0.35	0.45	0.55	0.65	0.90	1.41	1.89	2.25	2.57	2.97	3.26	3.52	3.58	3.42
-60	0.06	0.13	0.21	0.31	0.45	0.62	1.21	2.40	3.27	4.64	6.84	8.88	10.3	11.5	13.6	14.9	15.6	15.7	15.5
-50	0.06	0.14	0.26	0.44	0.67	1.76	3.24	5.89	9.53	13.3	16.5	20.8	24.0	27.2	29.4	30.7	31.6	32.1	32.2
-40	0.06	0.16	0.32	0.58	1.40	3.36	6.97	11.9	16.8	22.2	27.6	34.5	44.0	53.4	61.4	69.9	75.1	75.6	70.7
-30	0.06	0.17	0.38	0.70	2.37	6.01	11.1	17.0	23.8	31.8	44.4	66.0	98.4	144	201	258	300	293	263
-20	0.06	0.18	0.42	1.02	3.49	8.45	13.9	21.9	30.4	45.3	71.8	130	236	401	628	844	947	943	828
-10	0.06	0.19	0.46	1.18	4.50	9.70	17.1	25.1	35.7	56.5	98.1	198	403	738	1093	1381	1531	1540	1397
0	0.06	0.19	0.46	1.23	4.90	10.1	17.8	26.9	36.8	60.2	106	217	461	813	1161	1452	1602	1596	1427
10	0.06	0.18	0.45	1.14	4.45	9.64	17.0	25.5	33.1	48.4	81.6	150	285	508	734	928	1035	1018	879
20	0.06	0.18	0.42	0.91	3.44	8.00	14.4	22.0	28.4	37.4	53.5	79.6	122	194	277	338	376	364	308
30	0.06	0.16	0.37	0.67	2.23	5.67	10.9	17.0	23.0	28.7	35.6	44.1	55.3	69.2	83.3	94.3	99.8	101	92.8
40	0.06	0.15	0.31	0.55	1.17	3.35	6.63	11.2	15.5	20.5	25.5	30.4	34.3	37.7	41.5	44.3	44.9	44.9	44.3
50	0.06	0.13	0.24	0.42	0.65	1.42	3.05	5.27	8.09	11.1	13.8	16.8	20.0	22.8	25.1	26.7	27.7	27.9	27.3
60	0.06	0.12	0.18	0.29	0.44	0.61	0.84	1.65	2.71	4.30	5.51	6.76	7.78	8.80	9.67	10.3	10.7	10.7	10.3
70	0.06	0.10	0.14	0.19	0.26	0.35	0.44	0.55	0.67	0.78	0.91	1.19	1.54	1.94	2.20	2.34	2.39	2.26	2.05
80	0.06	0.08	0.10	0.12	0.14	0.16	0.19	0.21	0.25	0.29	0.32	0.36	0.40	0.43	0.46	0.49	0.52	0.53	0.52
90	0.06	0.07	0.07	0.07	0.06	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.08
100	0.06	0.06	0.06	0.06	0.07	0.07	0.07	0.07	0.08	0.08	0.07	0.08	0.09	0.09	0.09	0.09	0.10	0.10	0.10
110	0.06	0.06	0.06	0.07	0.07	0.08	0.08	0.09	0.10	0.11	0.12	0.13	0.15	0.16	0.17	0.18	0.19	0.20	0.21
120	0.06	0.06	0.07	0.07	0.08	0.10	0.11	0.12	0.15	0.17	0.19	0.22	0.26	0.30	0.34	0.38	0.42	0.46	0.49
130	0.06	0.06	0.07	0.08	0.10	0.12	0.14	0.17	0.20	0.25	0.31	0.38	0.48	0.59	0.72	0.86	0.98	1.09	1.19
140	0.06	0.06	0.07	0.09	0.11	0.14	0.18	0.22	0.28	0.37	0.48	0.65	0.87	1.13	1.43	1.77	2.10	2.39	2.63
150	0.06	0.07	0.08	0.09	0.12	0.16	0.21	0.28	0.37	0.51	0.72	1.01	1.40	1.92	2.53	3.18	3.85	4.36	4.76
160	0.06	0.07	0.08	0.10	0.13	0.17	0.23	0.32	0.45	0.64	0.94	1.38	1.99	2.78	3.74	4.73	5.55	6.13	6.45
170	0.06	0.07	0.08	0.11	0.14	0.19	0.26	0.35	0.50	0.73	1.09	1.61	2.36	3.35	4.53	5.66	6.50	6.90	6.87
180	0.06	0.07	0.08	0.11	0.14	0.19	0.26	0.35	0.50	0.72	1.06	1.58	2.32	3.31	4.50	5.67	6.61	7.20	7.41

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.7DEG
Operators:/
Test Date:2022-08-29

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity:60.5%
Test Distance:12.040m [K=1.0000]
Remarks:

GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.1V I:0.2849A P:60.723W PF:0.9681 Freq:49.99Hz Lamp Flux:577.015x12 lm																	
NAME: LED 地埋灯									TYPE:SL2150CE-12						WEIGHT:/		
SPEC.:60W AC220V 4000K									DIM.: 0.33*0.33*0.26						SERIAL No.:/		
MFR.: /									SUR.:0.23*0.23						Shielding Angle:/		

Table--2

UNIT: ×10cd

H(DEC) V(DEC)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	7.24	6.85	6.37	5.61	5.44	5.36	5.15	4.74	4.15	3.44	2.67	1.94	1.30	0.82	0.49	0.30	0.20	0.16	
-170	5.91	5.88	5.72	5.54	5.42	5.25	4.95	4.50	3.89	3.19	2.47	1.79	1.22	0.77	0.47	0.30	0.20	0.16	
-160	5.37	5.37	5.34	5.24	5.08	4.81	4.44	3.95	3.38	2.75	2.12	1.54	1.05	0.68	0.43	0.28	0.20	0.16	
-150	4.57	4.60	4.55	4.43	4.22	3.94	3.56	3.12	2.63	2.14	1.65	1.21	0.84	0.57	0.38	0.27	0.19	0.16	
-140	3.20	3.24	3.21	3.13	2.96	2.73	2.47	2.15	1.81	1.47	1.16	0.88	0.64	0.45	0.33	0.24	0.19	0.16	
-130	1.76	1.80	1.80	1.77	1.69	1.57	1.42	1.26	1.09	0.90	0.73	0.58	0.45	0.35	0.28	0.22	0.18	0.16	
-120	0.78	0.80	0.81	0.80	0.79	0.75	0.69	0.64	0.58	0.51	0.44	0.38	0.32	0.27	0.23	0.20	0.17	0.16	
-110	0.34	0.35	0.35	0.36	0.35	0.35	0.34	0.33	0.31	0.29	0.27	0.25	0.23	0.21	0.20	0.18	0.16	0.16	
-100	0.19	0.19	0.19	0.20	0.19	0.19	0.20	0.20	0.19	0.19	0.19	0.18	0.18	0.17	0.17	0.17	0.16	0.16	
-90	0.13	0.13	0.13	0.13	0.13	0.14	0.14	0.14	0.14	0.14	0.14	0.15	0.15	0.15	0.16	0.16	0.16	0.16	
-80	0.48	0.48	0.47	0.47	0.44	0.41	0.39	0.36	0.33	0.31	0.28	0.26	0.25	0.23	0.21	0.19	0.17	0.16	
-70	3.18	2.85	2.48	2.06	1.64	1.34	1.11	1.01	0.87	0.76	0.66	0.54	0.42	0.33	0.28	0.23	0.19	0.16	
-60	14.4	13.1	11.7	10.1	8.31	6.99	5.46	3.72	2.59	1.71	1.17	0.95	0.75	0.54	0.38	0.28	0.21	0.16	
-50	31.8	30.6	28.7	25.6	21.8	17.9	14.1	10.3	7.48	4.80	2.66	1.46	1.06	0.82	0.54	0.33	0.23	0.16	
-40	61.8	53.2	46.5	41.3	37.2	32.2	26.6	20.4	14.2	9.17	5.83	2.98	1.38	1.02	0.71	0.40	0.25	0.16	
-30	205	148	99.8	70.4	53.5	44.0	38.1	30.1	22.5	14.9	8.94	5.20	2.30	1.18	0.85	0.47	0.26	0.16	
-20	621	407	242	138	83.3	58.6	45.6	38.5	28.8	19.3	12.6	7.25	3.47	1.33	0.94	0.53	0.27	0.16	
-10	1088	724	416	217	119	75.1	55.2	43.8	34.3	22.5	14.4	8.78	4.12	1.51	1.00	0.57	0.28	0.16	
0	1106	737	418	223	119	75.4	55.8	46.5	36.2	23.1	14.6	9.24	4.31	1.55	1.02	0.59	0.28	0.16	
10	669	436	259	146	89.7	61.9	50.1	43.6	32.7	21.8	14.0	8.44	4.13	1.57	1.00	0.57	0.27	0.16	
20	242	169	116	81.6	61.5	51.0	45.3	37.6	27.1	17.9	11.8	6.76	3.46	1.46	0.93	0.52	0.26	0.16	
30	86.8	71.9	59.7	51.5	47.1	42.4	35.6	26.9	18.6	13.2	8.31	4.89	2.34	1.30	0.83	0.46	0.25	0.16	
40	43.8	43.0	41.4	38.4	33.3	27.3	21.0	16.2	11.7	7.82	4.98	2.83	1.50	1.04	0.69	0.38	0.23	0.16	
50	26.2	24.1	21.2	18.8	16.2	13.6	11.0	8.18	5.75	3.67	2.30	1.41	1.08	0.81	0.53	0.30	0.21	0.16	
60	9.90	9.34	8.66	7.71	6.57	5.25	4.09	2.84	1.96	1.35	1.12	0.94	0.76	0.56	0.36	0.22	0.18	0.16	
70	1.88	1.67	1.48	1.30	1.30	1.27	1.16	1.04	0.92	0.80	0.66	0.55	0.44	0.32	0.22	0.17	0.16	0.16	
80	0.53	0.52	0.51	0.48	0.47	0.46	0.43	0.39	0.35	0.30	0.26	0.22	0.19	0.17	0.14	0.12	0.14	0.16	
90	0.07	0.07	0.07	0.08	0.08	0.07	0.08	0.08	0.08	0.07	0.08	0.08	0.07	0.07	0.07	0.07	0.12	0.16	
100	0.10	0.11	0.10	0.10	0.10	0.10	0.09	0.09	0.09	0.09	0.08	0.07	0.08	0.07	0.07	0.07	0.12	0.16	
110	0.21	0.22	0.21	0.21	0.20	0.19	0.18	0.16	0.15	0.14	0.12	0.10	0.10	0.09	0.08	0.08	0.12	0.16	
120	0.51	0.51	0.50	0.48	0.44	0.40	0.35	0.31	0.26	0.22	0.18	0.15	0.13	0.11	0.09	0.09	0.13	0.16	
130	1.23	1.23	1.19	1.10	0.98	0.86	0.72	0.58	0.46	0.36	0.28	0.22	0.17	0.13	0.10	0.11	0.14	0.16	
140	2.73	2.73	2.61	2.36	2.05	1.71	1.36	1.05	0.79	0.58	0.41	0.30	0.21	0.16	0.12	0.14	0.15	0.16	
150	4.89	4.89	4.64	4.24	3.67	2.99	2.32	1.72	1.21	0.83	0.57	0.38	0.26	0.18	0.19	0.18	0.16	0.16	
160	6.51	6.44	6.21	5.78	5.12	4.30	3.34	2.41	1.64	1.10	0.72	0.47	0.38	0.36	0.29	0.22	0.18	0.16	
170	6.74	6.68	6.61	6.34	5.80	4.96	3.94	2.88	1.99	1.63	1.37	1.10	0.83	0.59	0.39	0.27	0.19	0.16	
180	7.24	6.85	6.37	5.61	5.44	5.36	5.15	4.74	4.15	3.44	2.67	1.94	1.30	0.82	0.49	0.30	0.20	0.16	

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.7DEG
Operators:/
Test Date:2022-08-29

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity:60.5%
Test Distance:12.040m [K=1.0000]
Remarks: