

LED INGROUND LIGHT

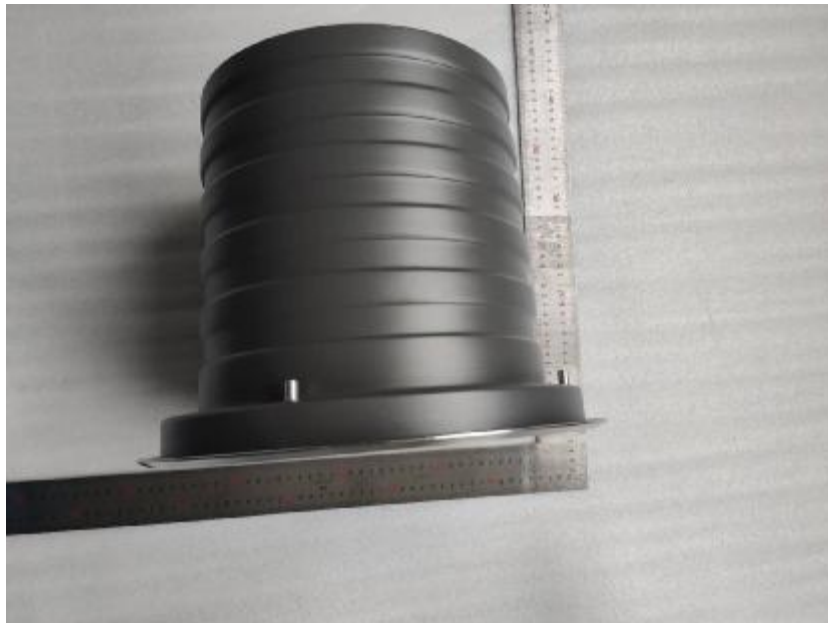

Light Output Ratio:	100.0%
Luminaire Power:	73.55 W
90% Beam Spread	5.1V x 4.3H
50% Beam Lumens	405.6 lumens per klm.

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2020-09-14

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity: 60%
Test Distance: 12.040m [K=1.0000]
Remarks:

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	15702.2 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	53.2V x 21.6H
	At 50% of Imax	14.5V x 11.1H
	At 90% of Imax	5.1V x 4.3H

Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	629.5 lumens per klm.
	To 50% of Imax	405.6 lumens per klm.
	To 90% of Imax	183.0 lumens per klm.

Upward LOR	1.5 %
Downward LOR	98.6 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2020-09-14

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity:60%
Test Distance:12.040m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.01V I:0.3419A P:73.551W PF:0.9779 Freq:49.99Hz Lamp Flux:423.303x12 lm		
NAME: SL2150CE-12	TYPE:Inground Light	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2020091406
MFR.: SHYLON	SUR.:	Shielding Angle:

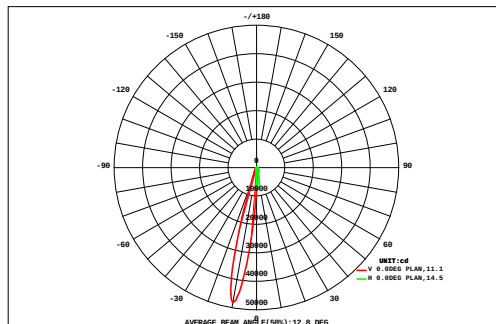

DATA OF LAMP		Eff:69.06lm/W	
MODEL		Imax(cd)	79762
NOMINAL POWER(W)	70	AVAILABILITY(%)	61.2
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	3108
NOMINAL FLUX(lm)	423.303	LOR(%)	100.0
LAMPS INSIDE	12	TOTAL FLUX(lm)	5080
TEST VOLTAGE(V)	219.959	q @50%(H,V)	11,15DEG

		AREA FLUX DIAGRAM															UNIT: lm			F t	F a	
		0.00	0.01	0.01	0.02	0.03	0.03	0.04	0.05	0.05	0.05	0.05	0.04	0.04	0.03	0.02	0.01	0.01	0.00	0.48	0.00	
VERTICAL (DEG)	90	0.00	0.01	0.02	0.05	0.08	0.12	0.15	0.17	0.19	0.20	0.19	0.16	0.12	0.08	0.05	0.03	0.01	0.00	1.65	0.00	
	80	0.00	0.02	0.05	0.10	0.18	0.30	0.53	0.79	1.02	1.13	1.10	0.93	0.65	0.35	0.14	0.05	0.02	0.00	7.34	0.00	
	70	0.00	0.02	0.08	0.18	0.49	1.11	1.91	2.67	3.31	3.56	3.34	2.73	1.93	1.15	0.48	0.12	0.03	0.00	23.1	0.00	
	60	0.00	0.03	0.11	0.40	1.23	2.55	4.09	5.54	6.50	6.92	6.57	5.48	3.86	2.29	1.05	0.28	0.04	0.01	47.0	0.00	
	50	0.00	0.04	0.17	0.80	2.23	4.47	7.28	9.54	11.2	11.7	11.1	9.05	6.26	3.58	1.67	0.50	0.06	0.01	79.8	0.00	
	40	0.00	0.05	0.26	1.24	3.29	6.81	9.95	13.3	17.8	20.6	20.2	15.8	9.70	5.05	2.28	0.71	0.09	0.01	127	0.00	
	30	0.01	0.05	0.35	1.60	4.20	8.27	12.0	18.8	29.3	40.0	39.8	27.4	14.8	6.78	2.85	0.89	0.12	0.01	207	0.00	
	-30	0.01	0.05	0.41	1.80	4.73	9.05	14.5	26.4	53.8	234	263	50.2	20.6	8.50	3.34	1.00	0.13	0.01	691	340	
		0.01	0.05	0.41	1.79	4.58	8.98	15.3	28.9	82.6	1153	1158	83.2	23.5	9.25	3.50	1.03	0.14	0.01	2575	2298	
		0.01	0.05	0.35	1.58	3.95	7.70	13.7	25.0	56.5	311	304	52.8	20.5	8.66	3.24	0.96	0.12	0.01	810	470	
		0.00	0.05	0.26	1.25	3.28	6.22	10.7	18.1	30.2	44.2	43.8	27.9	14.8	6.84	2.67	0.80	0.10	0.01	211	0.00	
		-40	0.00	0.04	0.17	0.85	2.44	4.73	7.68	11.6	16.6	20.4	19.6	14.7	9.27	4.68	2.00	0.57	0.07	0.01	116	0.00
		-50	0.00	0.03	0.10	0.47	1.46	3.07	4.98	6.98	8.77	9.83	9.43	7.80	5.26	2.91	1.26	0.34	0.05	0.01	62.7	0.00
		-60	0.00	0.02	0.07	0.20	0.67	1.54	2.58	3.71	4.50	4.81	4.59	3.76	2.65	1.53	0.61	0.16	0.03	0.00	31.5	0.00
		-70	0.00	0.02	0.05	0.10	0.22	0.49	0.92	1.40	1.77	1.93	1.81	1.48	1.01	0.54	0.22	0.06	0.02	0.00	12.0	0.00
	-80	0.00	0.01	0.03	0.05	0.08	0.12	0.16	0.24	0.31	0.35	0.34	0.27	0.20	0.12	0.06	0.03	0.01	0.00	2.38	0.00	
-90	0.00	0.01	0.02	0.02	0.03	0.04	0.05	0.05	0.06	0.06	0.06	0.05	0.05	0.04	0.03	0.02	0.01	0.00	0.58	0.00		
		-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)			20	30	40	50	60	70	80	90		
F t	0.07	0.56	2.92	12.5	33.2	65.6	107	173	324	1864	1886	304	135	62.4	25.5	7.55	1.04	0.09	5005	---		
F a	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1534	1574	0.00	0.00	0.00	0.00	0.00	0.00	0.00	---	3108		


one-half-peak spread: U:7.0,D:1.6 , L:5.7,R:5.7,EMA Beam Type: Type 2 x 4 (H x V)

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2020-09-14

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity:60%
Test Distance:12.040m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.01V I:0.3419A P:73.551W PF:0.9779 Freq:49.99Hz Lamp Flux:423.303x12 lm		
NAME: SL2150CE-12	TYPE:Inground Light	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2020091406
MFR.: SHYLON	SUR.:	Shielding Angle:

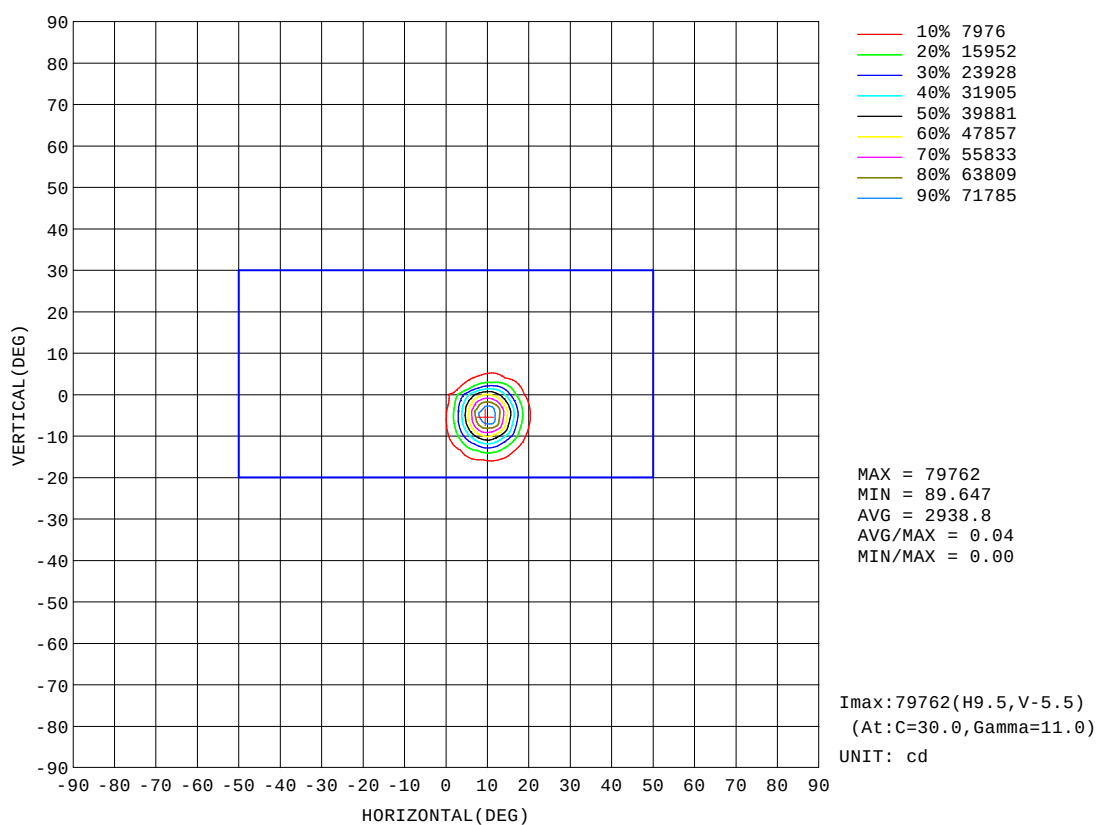


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2020-09-14

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
 Humidity:60%
 Test Distance:12.040m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:220.01V I:0.3419A P:73.551W PF:0.9779 Freq:49.99Hz Lamp Flux:423.303x12 lm		
NAME: SL2150CE-12	TYPE:Inground Light	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2020091406
MFR.: SHYLON	SUR.:	Shielding Angle:

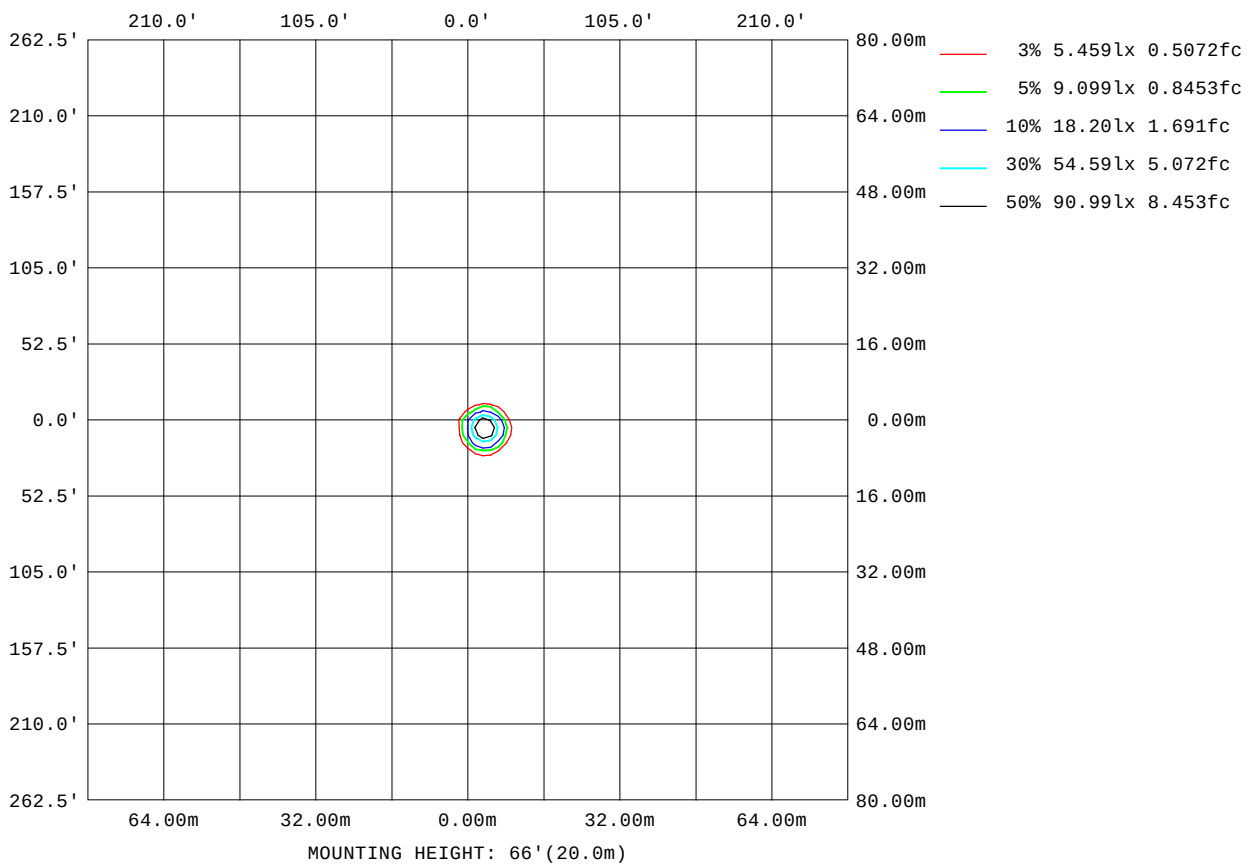

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2020-09-14

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity:60%
Test Distance:12.040m [K=1.0000]
Remarks:

Planar Illuminance Curve

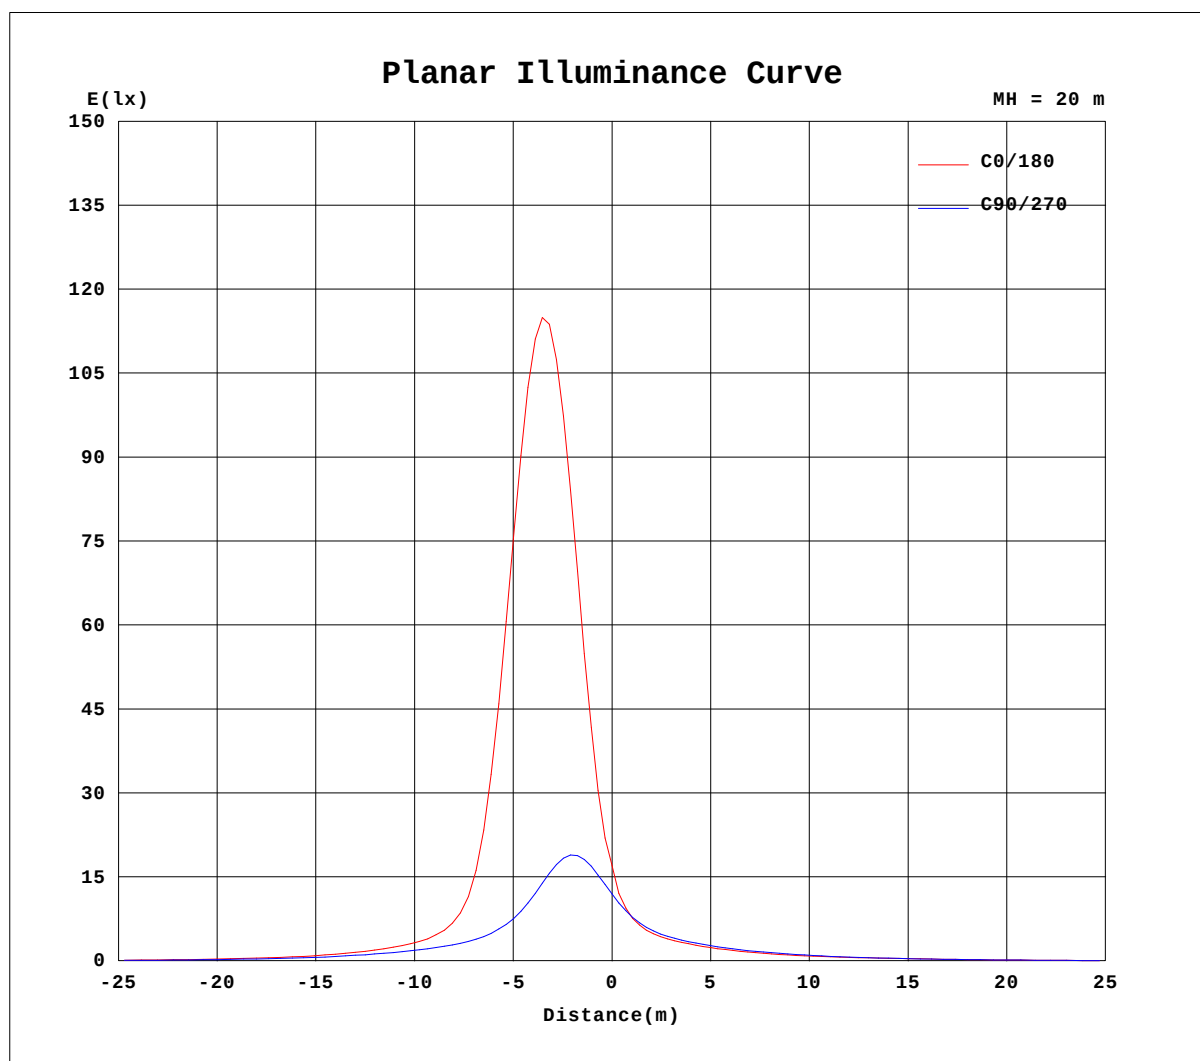


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2020-09-14

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity: 60%
Test Distance: 12.040m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.01V I:0.3419A P:73.551W PF:0.9779 Freq:49.99Hz Lamp Flux:423.303x12 lm		
NAME: SL2150CE-12	TYPE:Inground Light	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2020091406
MFR.: SHYLON	SUR.:	Shielding Angle:

Flux out:285.6 lm

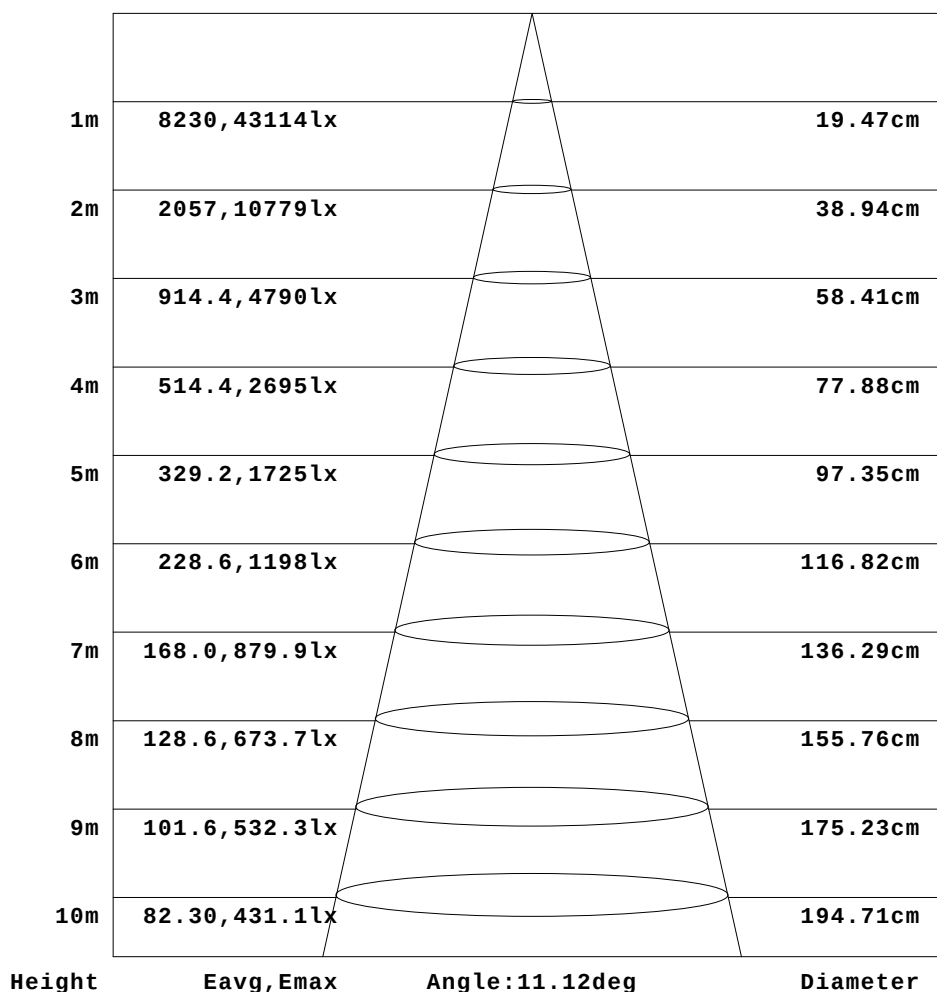

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2020-09-14

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity:60%
Test Distance:12.040m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.01V I:0.3419A P:73.551W PF:0.9779 Freq:49.99Hz Lamp Flux:423.303x12 lm		
NAME: SL2150CE-12	TYPE:Inground Light	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2020091406
MFR.: SHYLON	SUR.:	Shielding Angle:

Table--1

UNIT: x10cd

H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.05	0.06	0.09	0.12	0.16	0.23	0.32	0.51	0.86	1.32	1.87	2.99	5.62	9.30	9.59	5.91	3.42	3.33	4.08
-170	0.05	0.07	0.10	0.14	0.19	0.28	0.50	1.08	1.97	2.74	3.28	3.74	3.93	4.02	4.07	4.11	4.14	4.16	4.23
-160	0.05	0.07	0.10	0.15	0.22	0.31	0.54	1.25	2.42	3.18	3.56	3.71	3.79	3.87	3.95	3.99	4.02	4.04	4.01
-150	0.05	0.07	0.11	0.16	0.22	0.32	0.46	0.76	1.36	2.13	2.83	3.24	3.50	3.63	3.69	3.73	3.76	3.75	3.72
-140	0.05	0.07	0.11	0.16	0.22	0.29	0.34	0.43	0.59	0.87	1.26	1.66	2.04	2.31	2.50	2.56	2.54	2.41	2.17
-130	0.05	0.07	0.11	0.15	0.20	0.23	0.27	0.30	0.34	0.40	0.46	0.52	0.59	0.63	0.68	0.69	0.65	0.62	0.55
-120	0.05	0.07	0.10	0.14	0.17	0.19	0.20	0.22	0.25	0.27	0.28	0.30	0.30	0.31	0.32	0.32	0.32	0.31	0.30
-110	0.05	0.07	0.10	0.13	0.14	0.15	0.15	0.16	0.18	0.18	0.19	0.19	0.19	0.19	0.20	0.20	0.20	0.19	0.19
-100	0.05	0.07	0.09	0.11	0.12	0.12	0.11	0.12	0.12	0.13	0.13	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.11
-90	0.05	0.07	0.08	0.10	0.10	0.09	0.09	0.09	0.09	0.09	0.09	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.07
-80	0.05	0.07	0.10	0.12	0.14	0.15	0.17	0.18	0.20	0.22	0.24	0.27	0.29	0.31	0.33	0.34	0.35	0.36	0.36
-70	0.05	0.09	0.13	0.17	0.21	0.26	0.32	0.39	0.49	0.55	0.61	0.74	0.94	1.26	1.61	1.98	2.29	2.53	2.70
-60	0.05	0.10	0.16	0.23	0.32	0.44	0.59	0.70	1.08	1.68	2.52	3.62	4.72	5.91	7.01	8.10	9.04	9.81	10.4
-50	0.05	0.11	0.19	0.31	0.49	0.64	0.89	1.62	2.95	4.67	6.90	8.92	11.1	13.5	15.8	17.9	19.8	21.0	21.8
-40	0.05	0.12	0.23	0.41	0.64	0.83	1.81	3.65	5.78	8.69	12.5	15.5	19.0	22.7	26.2	30.1	33.7	38.7	42.7
-30	0.05	0.13	0.28	0.52	0.72	1.37	3.20	5.76	9.23	13.4	17.3	21.9	27.0	32.4	39.8	49.3	61.8	74.7	85.7
-20	0.05	0.14	0.31	0.60	0.85	2.09	4.57	7.96	12.0	16.8	21.7	27.7	34.6	44.3	56.0	72.8	95.4	128	170
-10	0.05	0.14	0.33	0.66	0.98	2.66	5.74	9.44	14.2	19.7	25.9	33.1	42.7	53.0	68.7	92.6	130	212	583
0	0.05	0.14	0.34	0.68	1.04	2.88	6.23	10.2	15.2	22.0	29.7	37.4	44.2	54.5	72.5	98.7	141	224	680
10	0.05	0.14	0.34	0.66	1.00	2.65	5.73	9.59	14.4	20.6	28.8	35.2	39.8	47.4	58.9	75.1	96.4	125	157
20	0.05	0.14	0.32	0.61	0.91	2.06	4.52	7.87	12.2	17.2	24.0	31.5	35.6	38.9	44.9	52.3	62.4	73.3	84.1
30	0.05	0.13	0.28	0.53	0.82	1.35	3.08	5.58	8.96	12.5	17.1	22.6	28.4	32.7	35.6	38.7	43.5	47.1	48.7
40	0.05	0.12	0.23	0.43	0.68	0.94	1.65	3.19	5.23	7.99	10.8	13.6	16.7	20.1	22.9	25.0	26.5	28.1	28.9
50	0.05	0.11	0.19	0.33	0.51	0.71	0.91	1.36	2.34	3.60	5.18	6.91	8.65	10.3	11.9	13.5	14.9	16.0	16.7
60	0.05	0.09	0.15	0.23	0.35	0.47	0.62	0.75	0.89	1.12	1.59	2.29	3.07	3.90	4.64	5.27	5.84	6.31	6.60
70	0.05	0.08	0.12	0.16	0.20	0.26	0.34	0.41	0.50	0.58	0.65	0.71	0.75	0.79	0.83	0.90	1.03	1.16	1.27
80	0.05	0.06	0.08	0.10	0.12	0.13	0.15	0.17	0.19	0.21	0.23	0.25	0.27	0.29	0.30	0.31	0.32	0.33	0.34
90	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04
100	0.05	0.05	0.05	0.05	0.05	0.06	0.06	0.06	0.06	0.06	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07
110	0.05	0.05	0.05	0.05	0.07	0.07	0.08	0.09	0.09	0.10	0.10	0.11	0.12	0.12	0.12	0.12	0.12	0.12	0.12
120	0.05	0.05	0.06	0.07	0.08	0.09	0.11	0.13	0.14	0.16	0.17	0.19	0.21	0.22	0.23	0.23	0.23	0.22	0.22
130	0.05	0.06	0.07	0.08	0.09	0.12	0.15	0.18	0.21	0.25	0.30	0.36	0.42	0.48	0.53	0.55	0.54	0.51	0.46
140	0.05	0.06	0.07	0.09	0.11	0.14	0.19	0.24	0.32	0.43	0.60	0.81	1.02	1.18	1.31	1.36	1.35	1.28	1.14
150	0.05	0.06	0.08	0.10	0.13	0.17	0.23	0.32	0.49	0.76	1.11	1.47	1.87	2.39	2.99	3.49	3.62	3.31	2.67
160	0.05	0.06	0.08	0.11	0.15	0.20	0.28	0.42	0.69	1.10	1.57	2.23	3.59	5.91	8.70	9.90	9.41	7.74	6.30
170	0.05	0.06	0.08	0.12	0.16	0.22	0.31	0.50	0.84	1.30	1.88	3.05	5.85	10.0	11.6	8.81	5.70	4.19	4.27
180	0.05	0.06	0.09	0.12	0.16	0.23	0.32	0.51	0.86	1.32	1.87	2.99	5.62	9.30	9.59	5.91	3.42	3.33	4.05

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2020-09-14

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity:60%
Test Distance:12.040m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.01V I:0.3419A P:73.551W PF:0.9779 Freq:49.99Hz Lamp Flux:423.303x12 lm		
NAME: SL2150CE-12	TYPE:Inground Light	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2020091406
MFR.: SHYLON	SUR.:	Shielding Angle:

Table--2

UNIT: x10cd

H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	4.46	4.44	4.34	4.17	3.98	3.62	2.67	1.39	0.68	0.46	0.36	0.29	0.23	0.18	0.14	0.11	0.08	0.08	
-170	4.23	4.18	4.09	3.98	3.79	3.22	2.10	1.05	0.59	0.43	0.34	0.28	0.22	0.18	0.14	0.11	0.08	0.08	
-160	3.99	3.93	3.85	3.66	3.13	2.17	1.21	0.67	0.48	0.39	0.32	0.26	0.21	0.17	0.14	0.11	0.08	0.08	
-150	3.63	3.43	3.00	2.34	1.54	0.92	0.60	0.46	0.38	0.33	0.28	0.24	0.20	0.16	0.13	0.11	0.08	0.08	
-140	1.84	1.41	1.05	0.74	0.57	0.47	0.41	0.35	0.31	0.27	0.23	0.20	0.17	0.15	0.12	0.10	0.08	0.08	
-130	0.51	0.46	0.42	0.39	0.35	0.32	0.30	0.27	0.24	0.21	0.19	0.17	0.15	0.13	0.11	0.09	0.08	0.08	
-120	0.30	0.29	0.28	0.26	0.24	0.23	0.21	0.20	0.18	0.17	0.15	0.14	0.12	0.12	0.10	0.09	0.08	0.08	
-110	0.19	0.18	0.18	0.17	0.16	0.15	0.15	0.14	0.14	0.13	0.12	0.11	0.10	0.10	0.09	0.08	0.08	0.08	
-100	0.11	0.11	0.11	0.11	0.10	0.10	0.10	0.10	0.10	0.09	0.09	0.08	0.08	0.08	0.08	0.08	0.07	0.08	
-90	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.08	0.08	0.07	0.07	0.08	0.08	0.08	
-80	0.37	0.37	0.36	0.36	0.35	0.35	0.33	0.31	0.28	0.26	0.24	0.21	0.19	0.16	0.14	0.12	0.10	0.08	
-70	2.80	2.84	2.81	2.68	2.38	2.06	1.75	1.46	1.07	0.79	0.57	0.41	0.34	0.27	0.21	0.16	0.12	0.08	
-60	10.7	10.7	10.3	9.57	8.76	7.92	7.05	5.71	4.18	3.05	2.13	1.27	0.70	0.40	0.30	0.21	0.14	0.08	
-50	22.4	22.3	22.0	21.0	19.7	17.5	14.7	12.4	10.1	7.51	4.86	3.11	1.76	0.79	0.39	0.26	0.16	0.08	
-40	46.0	46.9	44.9	41.8	38.3	34.1	28.7	21.9	16.9	13.0	9.14	5.69	3.25	1.53	0.55	0.30	0.18	0.08	
-30	96.5	101	96.6	85.9	73.1	59.4	46.9	35.5	26.3	18.4	13.0	8.90	4.82	2.36	0.77	0.34	0.19	0.08	
-20	232	273	241	181	133	94.8	70.0	50.1	35.8	24.8	16.5	10.8	6.60	3.14	1.02	0.37	0.20	0.08	
-10	2784	4957	2843	628	217	135	88.0	59.8	41.2	29.0	18.9	12.1	7.38	3.71	1.27	0.39	0.21	0.08	
0	2819	4816	2691	557	214	137	89.7	58.6	41.0	29.2	19.5	12.3	7.45	3.93	1.34	0.40	0.21	0.08	
10	197	222	208	165	127	95.5	69.6	49.1	34.8	25.0	17.5	11.5	7.00	3.58	1.20	0.38	0.20	0.08	
20	90.2	94.2	92.8	85.9	75.4	60.6	47.7	36.1	26.6	19.5	14.6	9.75	6.05	2.91	0.90	0.36	0.20	0.08	
30	50.6	51.2	49.8	47.4	42.5	36.4	30.9	25.0	19.5	15.1	11.2	7.35	4.50	2.03	0.65	0.33	0.18	0.08	
40	29.6	29.5	29.0	27.5	25.4	23.1	20.2	16.3	13.5	10.6	7.63	5.08	2.73	1.16	0.46	0.29	0.17	0.08	
50	16.8	16.6	16.4	15.9	14.6	13.0	11.3	9.44	7.66	6.05	4.09	2.54	1.28	0.55	0.35	0.24	0.16	0.08	
60	6.94	7.08	6.97	6.57	6.13	5.48	4.82	4.09	3.05	2.24	1.52	0.82	0.48	0.34	0.26	0.19	0.14	0.08	
70	1.35	1.39	1.39	1.36	1.24	1.10	0.91	0.73	0.58	0.48	0.40	0.34	0.29	0.23	0.18	0.15	0.12	0.08	
80	0.34	0.34	0.33	0.32	0.30	0.29	0.27	0.25	0.24	0.21	0.19	0.16	0.15	0.13	0.12	0.11	0.09	0.08	
90	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.05	0.04	0.04	0.04	0.05	0.05	0.05	0.06	0.07	0.08	
100	0.06	0.06	0.05	0.05	0.05	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.05	0.06	0.08	
110	0.11	0.11	0.10	0.10	0.09	0.09	0.08	0.07	0.07	0.06	0.06	0.05	0.04	0.04	0.04	0.05	0.06	0.08	
120	0.20	0.19	0.17	0.16	0.15	0.14	0.12	0.10	0.09	0.09	0.08	0.07	0.06	0.04	0.05	0.06	0.06	0.08	
130	0.40	0.34	0.30	0.27	0.24	0.21	0.18	0.15	0.13	0.12	0.10	0.08	0.07	0.05	0.06	0.06	0.07	0.08	
140	0.99	0.82	0.65	0.49	0.38	0.30	0.25	0.21	0.18	0.15	0.12	0.10	0.08	0.08	0.07	0.07	0.07	0.08	
150	2.11	1.61	1.24	0.94	0.66	0.46	0.34	0.27	0.22	0.18	0.15	0.11	0.10	0.10	0.09	0.08	0.08	0.08	
160	4.82	3.26	2.10	1.43	1.02	0.68	0.45	0.33	0.26	0.21	0.18	0.16	0.14	0.13	0.11	0.09	0.08	0.08	
170	5.96	5.05	3.03	1.85	1.27	0.84	0.67	0.55	0.41	0.32	0.27	0.23	0.19	0.16	0.13	0.10	0.08	0.08	
180	4.46	4.44	4.34	4.17	3.98	3.62	2.67	1.39	0.68	0.46	0.36	0.29	0.23	0.18	0.14	0.11	0.08	0.08	

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2020-09-14

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity:60%
Test Distance:12.040m [K=1.0000]
Remarks: