

LED INGROUND LIGHT



Light Output Ratio:	100.0%
Luminaire Power:	4.568 W
90% Beam Spread	207.5V x 180.0H
50% Beam Lumens	446.3 lumens per klm.

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 23DEG
Operators:
Test Date: 2018-03-26

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity: 56%
Test Distance: 10.580m [K=1.0000]
Remarks:

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	424.4 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	209.9V x 180.0H
	At 50% of Imax	208.4V x 180.0H
	At 90% of Imax	207.5V x 180.0H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	966.0 lumens per klm.
	To 50% of Imax	446.3 lumens per klm.
	To 90% of Imax	52.8 lumens per klm.

Upward LOR	20.7 %
Downward LOR	79.3 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:23DEG
Operators:
Test Date:2018-03-26

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity:56%
Test Distance:10.580m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.10V I:0.0537A P:4.5678W PF:0.3862 Freq:49.99Hz Lamp Flux:15.5345x4 lm		
NAME: SL2104CB-4	TYPE:Inground Light	SERIAL No.:2018032603
	SUR.:	

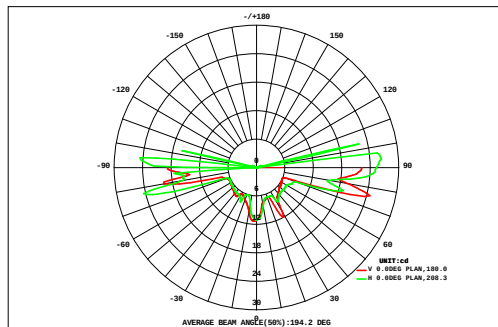

DATA OF LAMP		Eff:13.60lm/W	
MODEL		Imax(cd)	26.37
NOMINAL POWER(W)	4	AVAILABILITY(%)	97.0
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	60.27
NOMINAL FLUX(lm)	15.5345	LOR(%)	100.0
LAMPS INSIDE	4	TOTAL FLUX(lm)	62.14
TEST VOLTAGE(V)	220.116	q @50%(H,V)	180,208DEG

		AREA FLUX DIAGRAM																UNIT: lm				F t	F a
VERTICAL (DEG)	90	0.06	0.16	0.23	0.19	0.07	0.24	0.42	0.48	0.40	0.41	0.51	0.43	0.25	0.06	0.14	0.16	0.12	0.05	4.35	4.32		
	80	0.06	0.15	0.18	0.13	0.05	0.14	0.28	0.43	0.49	0.48	0.39	0.25	0.12	0.04	0.07	0.12	0.10	0.04	3.53	3.46		
	70	0.05	0.14	0.17	0.08	0.04	0.07	0.14	0.18	0.19	0.19	0.19	0.16	0.09	0.05	0.07	0.12	0.11	0.04	2.08	1.99		
	60	0.05	0.15	0.17	0.08	0.05	0.07	0.14	0.17	0.19	0.20	0.19	0.15	0.08	0.06	0.08	0.10	0.12	0.04	2.09	2.00		
	50	0.05	0.16	0.12	0.08	0.08	0.06	0.13	0.17	0.20	0.20	0.19	0.14	0.07	0.09	0.09	0.08	0.12	0.04	2.07	2.01		
	40	0.05	0.16	0.09	0.09	0.10	0.08	0.11	0.17	0.19	0.21	0.18	0.14	0.10	0.11	0.10	0.08	0.10	0.04	2.10	2.09		
	30	0.05	0.15	0.08	0.10	0.12	0.13	0.14	0.16	0.18	0.21	0.18	0.15	0.13	0.12	0.10	0.08	0.09	0.04	2.23	2.23		
		0.05	0.14	0.08	0.11	0.14	0.16	0.17	0.18	0.19	0.21	0.19	0.16	0.15	0.14	0.11	0.08	0.08	0.04	2.37	2.37		
		0.05	0.14	0.08	0.11	0.14	0.19	0.21	0.19	0.26	0.30	0.20	0.17	0.17	0.14	0.11	0.08	0.08	0.04	2.67	2.67		
		0.05	0.14	0.08	0.11	0.14	0.20	0.23	0.18	0.26	0.29	0.22	0.18	0.17	0.15	0.11	0.08	0.08	0.04	2.70	2.70		
		0.05	0.14	0.08	0.11	0.14	0.17	0.17	0.18	0.21	0.20	0.19	0.17	0.15	0.14	0.12	0.08	0.08	0.04	2.42	2.42		
	-30	0.05	0.15	0.08	0.10	0.13	0.14	0.15	0.18	0.19	0.20	0.17	0.15	0.14	0.13	0.11	0.08	0.08	0.04	2.28	2.28		
	-40	0.05	0.16	0.10	0.10	0.11	0.12	0.14	0.18	0.21	0.24	0.19	0.15	0.13	0.11	0.10	0.08	0.09	0.04	2.30	2.30		
	-50	0.05	0.16	0.14	0.09	0.10	0.11	0.15	0.19	0.21	0.22	0.20	0.15	0.13	0.10	0.09	0.08	0.10	0.04	2.29	2.29		
	-60	0.05	0.14	0.18	0.09	0.08	0.10	0.15	0.19	0.22	0.22	0.20	0.16	0.12	0.10	0.08	0.09	0.10	0.04	2.31	2.31		
	-70	0.06	0.14	0.17	0.10	0.06	0.09	0.15	0.22	0.24	0.25	0.23	0.17	0.12	0.08	0.08	0.11	0.10	0.04	2.41	2.38		
-80	0.06	0.15	0.21	0.16	0.06	0.14	0.23	0.33	0.43	0.47	0.42	0.26	0.15	0.08	0.10	0.12	0.10	0.05	3.52	3.50			
-90	0.06	0.16	0.24	0.21	0.08	0.32	0.54	0.64	0.66	0.65	0.61	0.50	0.30	0.10	0.15	0.17	0.13	0.05	5.58	5.57			
		-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)				20	30	40	50	60	70	80	90		
F t	0.95	2.68	2.46	2.04	1.69	2.52	3.65	4.43	4.93	5.14	4.63	3.63	2.57	1.81	1.80	1.82	1.79	0.77	49	---			
F a	0.95	2.68	2.46	2.04	1.53	2.42	3.65	4.43	4.93	5.14	4.63	3.63	2.52	1.70	1.80	1.82	1.79	0.77	---	49			


one-half-peak spread: U:1.5,D:0.8 , L:22.1,R:20.1
NEMA Beam Type: Type 7

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:23DEG
Operators:
Test Date:2018-03-26

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity:56%
Test Distance:10.580m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.10V I:0.0537A P:4.5678W PF:0.3862 Freq:49.99Hz Lamp Flux:15.5345x4 lm		
NAME: SL2104CB-4	TYPE:Inground Light	SERIAL No.:2018032603
	SUR.:	

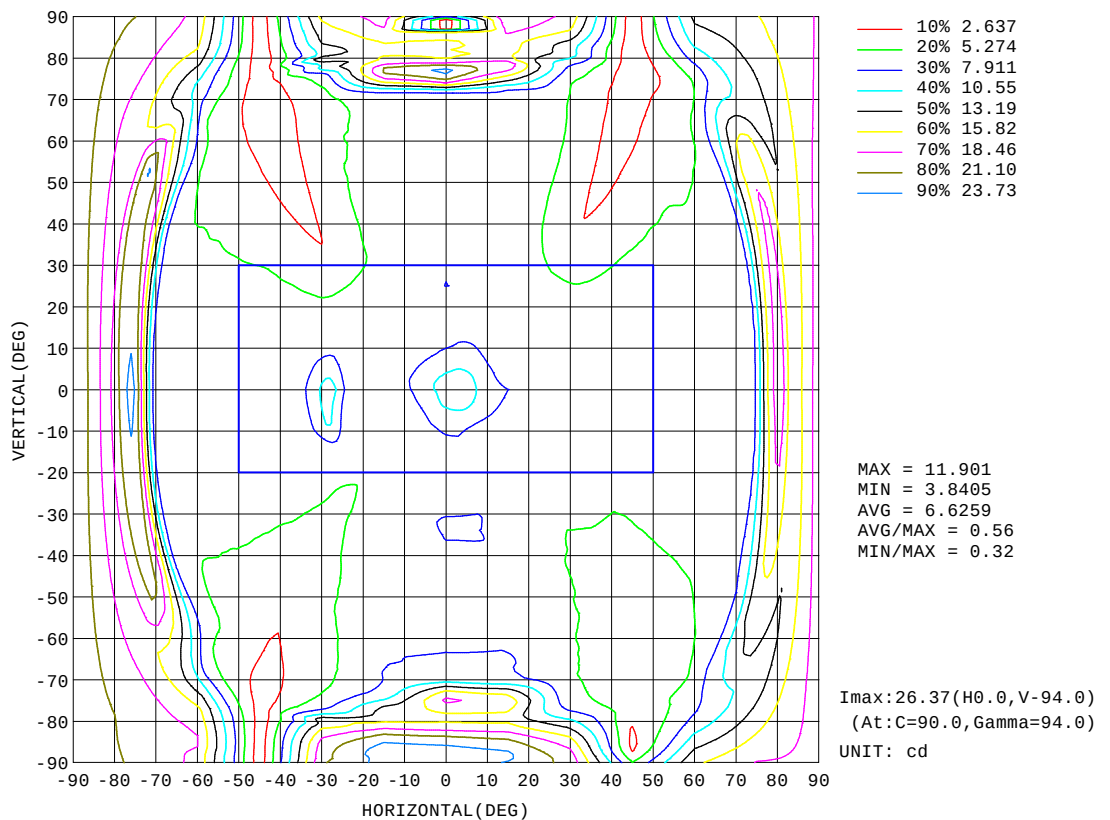


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:23DEG
Operators:
Test Date:2018-03-26

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity:56%
Test Distance:10.580m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.10V I:0.0537A P:4.5678W PF:0.3862 Freq:49.99Hz Lamp Flux:15.5345x4 lm		
NAME: SL2104CB-4	TYPE:Inground Light	SERIAL No.:2018032603
	SUR.:	

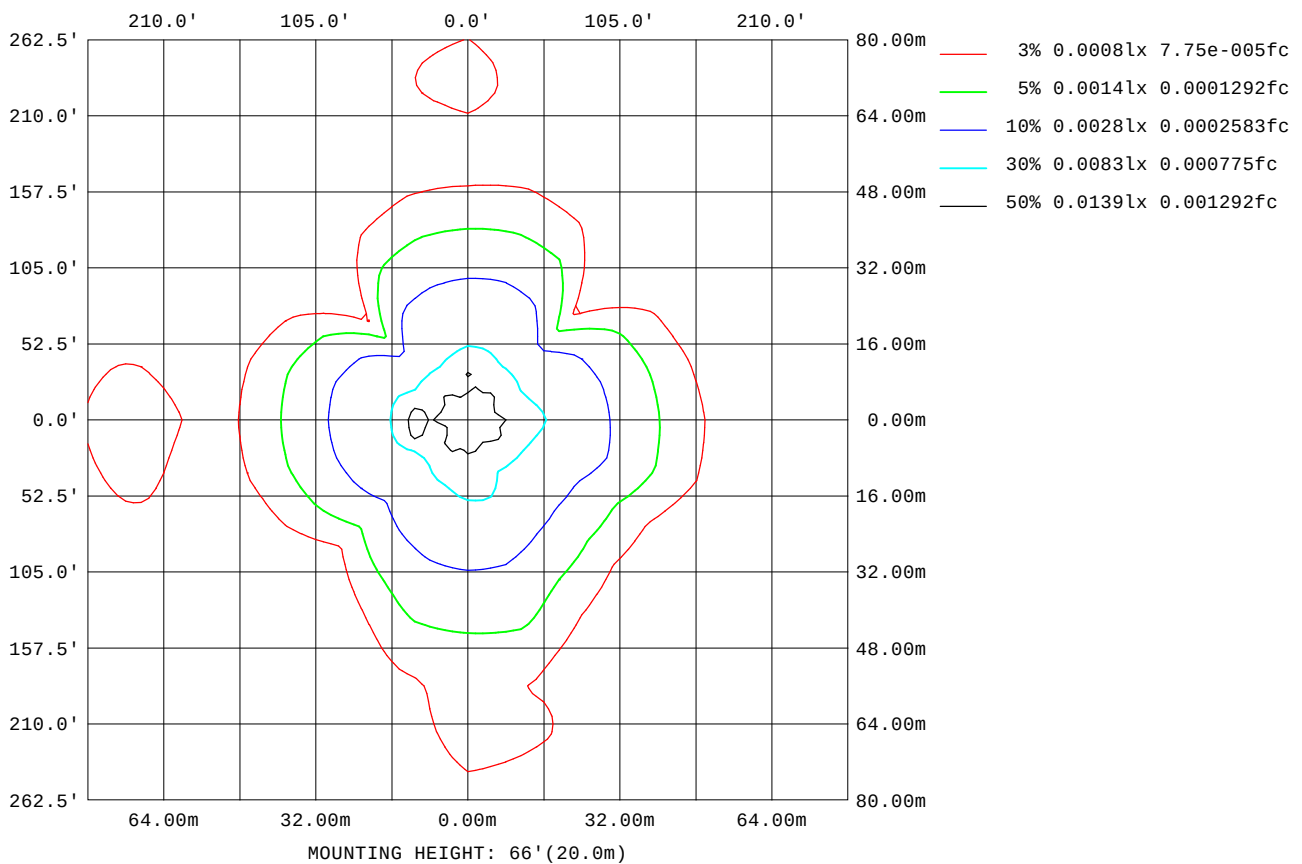

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:23DEG
Operators:
Test Date:2018-03-26

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity:56%
Test Distance:10.580m [K=1.0000]
Remarks:

Planar Illuminance Curve

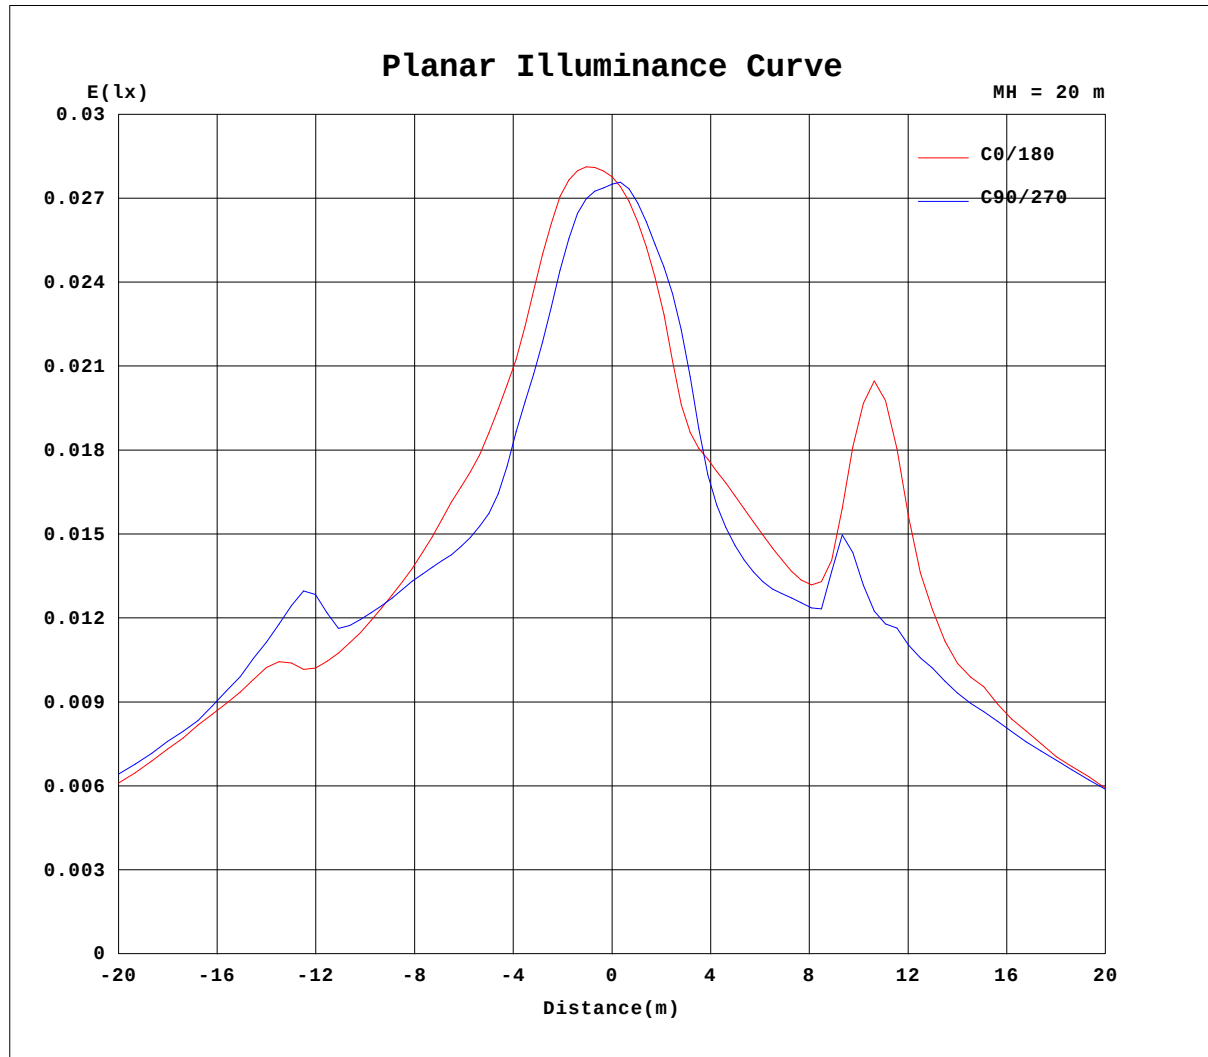


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 23DEG
Operators:
Test Date: 2018-03-26

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity: 56%
Test Distance: 10.580m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.10V I:0.0537A P:4.5678W PF:0.3862 Freq:49.99Hz Lamp Flux:15.5345x4 lm		
NAME: SL2104CB-4	TYPE:Inground Light	SERIAL No.:2018032603
	SUR.:	

Flux out:11.96 lm

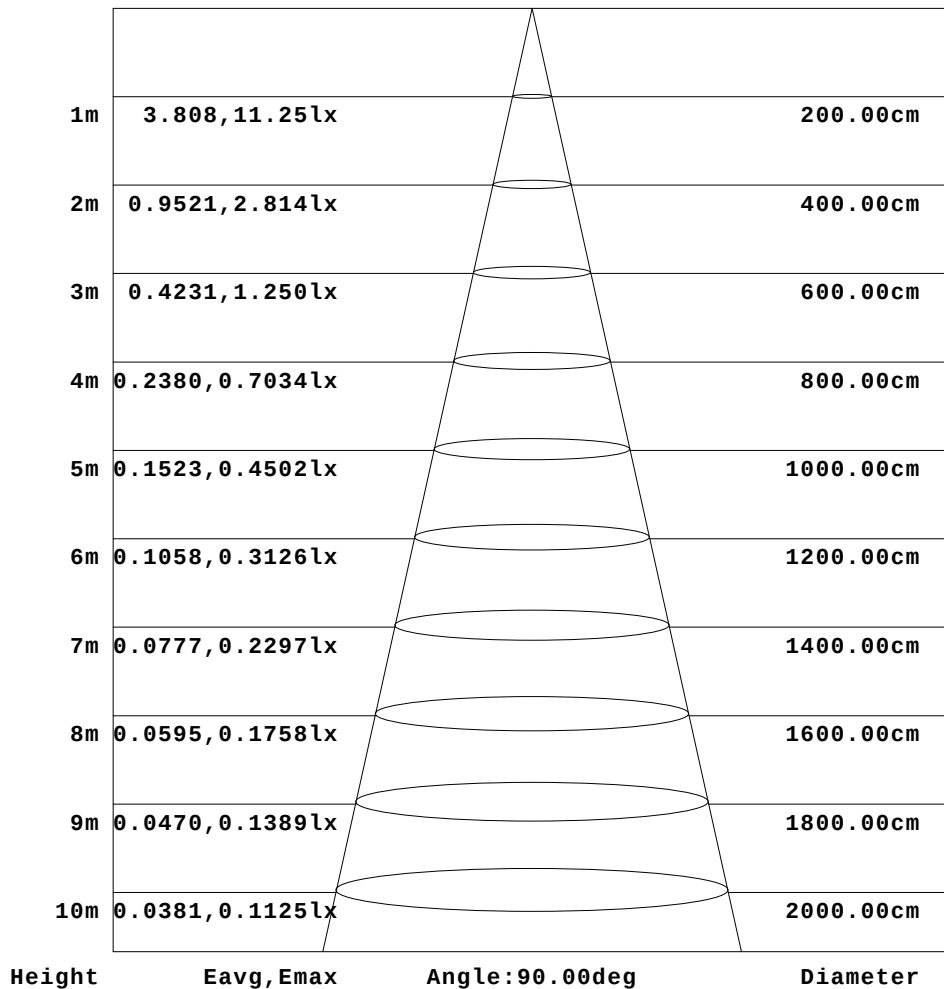

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 23DEG
 Operators:
 Test Date: 2018-03-26

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE G0-2000A_V1 SYSTEM V2.0.402
 Humidity: 56%
 Test Distance: 10.580m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.10V I:0.0537A P:4.5678W PF:0.3862 Freq:49.99Hz Lamp Flux:15.5345x4 lm		
NAME: SL2104CB-4	TYPE:Inground Light	SERIAL No.:2018032603
	SUR.:	

Table--1
UNIT: cd

H(DEC) V(DEC)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	22.2	0.57	0.47	0.24	1.07	0.74	0.17	0.15	0.14	0.15	0.14	0.12	0.12	0.12	0.12	0.13	0.12	0.13	0.13
-170	22.2	2.23	3.04	0.25	1.02	0.72	0.17	0.16	0.15	0.14	0.14	0.12	0.11	0.12	0.14	0.14	0.14	0.15	0.13
-160	22.2	7.11	5.52	0.21	0.98	0.87	0.16	0.15	0.15	0.15	0.14	0.13	0.12	0.12	0.12	0.12	0.11	0.12	0.14
-150	22.2	15.0	7.78	0.25	0.85	0.88	0.21	0.16	0.16	0.16	0.15	0.15	0.14	0.14	0.13	0.14	0.15	0.16	0.18
-140	22.2	22.1	7.54	2.41	0.40	0.85	0.63	0.15	0.16	0.17	0.15	0.15	0.15	0.14	0.14	0.14	0.14	0.16	0.17
-130	22.2	22.6	1.93	17.5	0.36	0.57	0.73	0.43	0.16	0.18	0.16	0.17	0.15	0.16	0.16	0.16	0.17	0.18	0.20
-120	22.2	22.6	0.96	12.3	19.3	0.46	0.56	0.61	0.47	0.31	0.18	0.18	0.18	0.21	0.33	0.35	0.35	0.37	0.44
-110	22.2	22.3	21.6	0.56	7.85	20.2	5.54	0.29	0.67	0.33	0.27	0.24	0.21	0.20	0.23	0.28	0.49	0.72	0.95
-100	22.2	22.0	21.9	21.6	17.7	6.05	0.37	1.04	3.26	0.74	0.30	0.30	0.29	0.23	0.24	0.24	0.25	0.24	0.24
-90	22.2	21.8	21.3	20.9	19.8	18.8	17.8	12.2	6.64	1.07	7.64	14.2	20.8	22.1	23.4	24.7	24.9	25.1	25.3
-80	22.2	21.7	21.1	20.4	19.5	18.6	17.4	12.0	6.52	1.50	5.28	9.49	14.3	15.3	15.1	15.6	15.5	15.5	15.6
-70	22.2	21.5	20.4	19.2	17.4	14.8	11.0	6.20	3.58	2.01	2.47	3.62	4.64	5.74	6.85	7.97	8.69	8.92	9.11
-60	22.2	21.3	19.6	17.5	16.9	14.4	8.78	5.14	4.07	3.03	2.69	3.68	4.61	5.46	6.18	6.77	7.06	7.20	7.38
-50	22.2	21.0	18.4	18.2	20.9	13.0	6.19	4.89	4.45	4.05	3.69	3.96	4.77	5.43	5.94	6.40	6.80	7.07	7.38
-40	22.2	20.7	17.5	21.0	18.7	6.97	5.41	5.30	5.19	4.95	4.69	4.47	4.68	5.32	5.88	6.27	6.60	6.99	7.42
-30	22.2	20.4	17.6	22.6	12.5	6.00	5.78	5.66	5.61	5.58	5.52	5.32	5.08	5.09	5.63	6.14	6.29	6.81	7.51
-20	22.2	20.2	18.5	23.1	8.40	5.81	5.93	6.00	6.09	6.27	6.34	6.11	5.70	5.49	5.57	6.09	6.54	6.24	6.66
-10	22.2	20.0	19.2	23.0	6.99	5.90	5.97	6.13	6.33	6.72	6.97	7.17	8.81	7.44	5.57	5.75	6.92	7.51	8.27
0	22.2	20.0	19.6	23.6	6.49	5.98	6.06	6.25	6.42	6.69	7.10	7.56	11.1	8.56	6.59	7.06	7.57	9.78	11.1
10	22.2	19.9	19.5	22.6	6.94	5.92	5.99	6.17	6.34	6.52	6.82	7.01	7.24	6.73	5.85	6.10	7.06	7.12	7.86
20	22.2	20.0	18.8	22.5	8.17	5.83	5.97	6.05	6.14	6.05	5.99	5.77	5.45	5.60	5.92	5.88	5.61	5.61	6.13
30	22.2	20.3	17.7	22.2	11.0	5.89	5.72	5.54	5.38	5.25	4.95	4.23	3.85	4.33	5.23	5.53	5.75	6.27	7.17
40	22.2	20.6	17.1	22.7	16.6	6.51	5.25	5.00	4.76	4.16	3.37	2.54	2.90	4.27	5.49	5.87	6.18	6.46	6.76
50	22.2	20.8	17.8	19.5	20.7	11.0	5.36	4.50	3.91	3.00	2.09	2.28	3.63	4.96	5.54	5.87	6.15	6.32	6.48
60	22.2	21.1	18.8	16.7	18.5	14.6	7.74	4.12	3.06	2.07	1.53	2.82	4.18	5.23	5.58	5.94	6.12	6.23	6.34
70	22.2	21.4	20.0	17.9	15.5	12.6	9.60	5.31	3.06	1.52	2.00	3.28	4.46	5.40	6.10	6.66	6.63	6.53	6.48
80	22.2	21.7	20.9	19.9	18.3	16.6	14.6	9.60	5.04	1.22	4.20	8.20	14.0	15.6	15.2	16.1	16.1	15.9	15.7
90	22.2	21.9	21.5	21.1	20.0	18.9	17.8	12.1	6.46	0.78	6.04	11.3	16.6	17.6	18.6	19.6	15.8	11.9	8.11
100	22.2	22.1	21.9	21.7	18.1	7.22	0.51	0.41	3.21	0.81	0.22	0.21	0.19	0.20	0.21	0.22	0.21	0.21	0.20
110	22.2	22.3	21.5	0.63	8.34	21.2	11.9	0.32	0.37	0.34	0.29	0.25	0.23	0.21	0.21	0.22	0.43	0.70	0.96
120	22.2	22.6	1.00	12.5	20.1	0.40	0.48	0.56	0.45	0.31	0.18	0.18	0.19	0.19	0.21	0.21	0.26	0.27	0.28
130	22.2	22.6	2.02	17.2	0.37	0.56	0.70	0.61	0.16	0.16	0.16	0.16	0.15	0.17	0.16	0.17	0.17	0.18	0.18
140	22.2	22.0	7.61	2.66	0.40	0.85	0.73	0.16	0.15	0.15	0.15	0.14	0.14	0.14	0.14	0.15	0.15	0.16	0.17
150	22.2	14.9	7.73	0.27	0.87	0.92	0.26	0.16	0.15	0.15	0.13	0.13	0.13	0.12	0.13	0.14	0.14	0.15	0.17
160	22.2	7.10	5.44	0.22	0.99	0.91	0.16	0.15	0.15	0.14	0.13	0.12	0.12	0.12	0.11	0.12	0.13	0.14	0.13
170	22.2	2.23	2.98	0.25	1.03	0.75	0.17	0.15	0.15	0.13	0.12	0.12	0.11	0.11	0.13	0.15	0.12	0.13	0.12
180	22.2	0.57	0.47	0.24	1.07	0.74	0.17	0.15	0.14	0.15	0.14	0.12	0.12	0.12	0.12	0.13	0.12	0.13	0.12

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:23DEG
Operators:
Test Date:2018-03-26

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
Humidity:56%
Test Distance:10.580m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.10V I:0.0537A P:4.5678W PF:0.3862 Freq:49.99Hz Lamp Flux:15.5345x4 lm		
NAME: SL2104CB-4	TYPE:Inground Light	SERIAL No.:2018032603
	SUR.:	

Table--2

UNIT: cd

H(DEC) V(DEC)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.14	0.14	0.14	0.13	0.13	0.12	0.14	0.14	0.16	0.17	0.17	0.18	0.19	0.46	1.05	0.38	0.63	18.7	
-170	0.15	0.14	0.14	0.13	0.11	0.12	0.13	0.14	0.16	0.17	0.18	0.18	0.19	0.46	2.11	2.92	1.39	18.7	
-160	0.12	0.12	0.12	0.12	0.11	0.12	0.13	0.14	0.16	0.18	0.18	0.18	0.18	0.47	5.04	5.37	3.64	18.7	
-150	0.16	0.14	0.14	0.14	0.13	0.13	0.15	0.14	0.15	0.17	0.17	0.17	0.27	0.50	0.23	7.64	7.33	18.7	
-140	0.17	0.14	0.15	0.15	0.14	0.15	0.14	0.15	0.16	0.16	0.17	0.17	0.39	0.58	0.42	9.54	12.0	18.7	
-130	0.18	0.16	0.16	0.15	0.15	0.15	0.15	0.15	0.16	0.16	0.17	0.32	0.49	0.27	17.0	4.83	17.0	18.7	
-120	0.43	0.46	0.48	0.39	0.20	0.16	0.16	0.16	0.16	0.22	0.33	0.86	0.43	18.9	18.7	0.75	18.9	18.7	
-110	0.72	0.47	0.25	0.19	0.17	0.16	0.16	0.18	0.25	0.39	0.32	5.60	21.2	16.3	0.54	16.2	19.0	18.7	
-100	0.23	0.22	0.21	0.20	0.18	0.21	0.24	0.26	0.80	6.30	7.33	0.39	3.43	15.3	21.3	19.9	18.9	18.7	
-90	24.7	24.1	23.6	22.4	21.3	20.2	15.3	10.3	5.36	8.68	12.0	15.3	16.4	17.5	18.6	18.6	18.7	18.7	
-80	15.5	15.4	15.3	13.7	12.3	11.0	8.76	5.90	2.89	4.33	6.25	8.75	10.7	12.6	14.7	16.8	18.3	18.7	
-70	9.12	9.16	8.81	8.07	7.04	5.62	4.92	4.02	3.50	3.94	4.65	6.38	9.48	11.3	12.1	14.7	17.6	18.7	
-60	7.33	7.31	7.11	6.56	5.93	5.39	4.98	4.41	4.23	4.18	4.38	5.26	7.04	11.9	13.8	13.2	16.8	18.7	
-50	7.35	7.30	6.83	6.22	5.68	5.36	4.99	4.79	4.67	4.57	4.64	5.34	6.34	8.17	14.8	13.4	16.0	18.7	
-40	7.59	7.71	6.62	5.64	5.45	5.22	5.03	5.00	4.90	5.00	5.34	5.74	6.50	7.30	12.8	15.3	15.5	18.7	
-30	7.66	7.32	5.75	5.42	5.36	5.37	5.38	5.27	5.45	5.79	6.11	6.31	6.47	7.14	11.2	17.2	15.1	18.7	
-20	6.44	5.84	5.86	5.92	5.75	5.68	5.81	6.19	6.29	6.55	6.68	6.49	6.41	6.95	9.65	18.3	14.8	18.7	
-10	7.67	7.02	7.14	6.77	6.18	6.16	6.36	6.73	6.78	6.64	6.59	6.46	6.39	6.81	8.52	19.1	14.7	18.7	
0	11.2	9.39	7.92	7.19	6.65	6.44	7.45	7.28	6.92	6.63	6.50	6.36	6.39	6.79	8.10	19.9	14.8	18.7	
10	8.35	7.41	6.41	5.67	5.67	5.89	6.26	6.55	6.59	6.43	6.32	6.25	6.23	6.70	8.62	19.7	14.8	18.7	
20	6.53	5.99	6.34	6.35	5.73	5.50	5.73	5.97	6.11	6.18	6.16	6.14	6.08	6.72	10.2	19.3	14.9	18.7	
30	7.44	6.74	5.95	5.75	5.19	4.69	4.77	5.22	5.48	5.64	5.80	5.88	6.03	6.86	13.2	18.3	15.1	18.7	
40	6.72	6.69	6.32	5.96	4.89	3.56	3.05	3.78	4.60	5.24	5.45	5.54	6.10	7.39	16.1	15.8	15.5	18.7	
50	6.54	6.60	6.37	6.01	5.47	4.08	2.66	2.45	3.47	4.45	4.96	5.34	6.25	12.3	18.3	13.5	16.0	18.7	
60	6.39	6.44	6.36	6.11	5.88	4.80	3.30	1.83	2.43	3.42	4.33	5.38	9.41	15.6	14.4	13.5	16.5	18.7	
70	6.61	6.79	6.92	6.53	6.02	5.14	3.79	2.38	1.79	2.75	3.54	5.44	9.60	11.2	12.6	14.6	17.1	18.7	
80	16.1	16.5	16.6	14.1	12.1	10.6	7.82	4.32	1.13	3.06	5.67	9.02	11.0	12.6	13.9	15.8	17.6	18.7	
90	12.3	16.6	20.8	19.8	18.7	17.7	12.1	6.42	0.78	5.14	9.50	13.9	14.5	15.1	15.7	16.7	17.7	18.7	
100	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.19	0.20	0.31	0.33	0.32	1.47	11.1	17.8	17.5	17.7	18.7	
110	0.72	0.47	0.25	0.21	0.19	0.18	0.18	0.19	0.23	0.32	0.28	2.42	9.06	10.7	0.46	13.3	17.8	18.7	
120	0.32	0.39	0.44	0.37	0.22	0.17	0.18	0.18	0.19	0.22	0.34	0.56	0.37	17.0	17.5	0.64	17.9	18.7	
130	0.18	0.16	0.16	0.16	0.15	0.16	0.17	0.17	0.18	0.18	0.18	0.32	0.54	0.26	15.8	4.45	16.0	18.7	
140	0.16	0.13	0.14	0.13	0.14	0.14	0.14	0.16	0.17	0.18	0.19	0.18	0.41	0.68	0.39	8.96	10.7	18.7	
150	0.14	0.13	0.13	0.13	0.13	0.14	0.14	0.14	0.16	0.18	0.18	0.18	0.26	0.52	0.23	7.21	6.60	18.7	
160	0.12	0.12	0.13	0.12	0.12	0.12	0.13	0.14	0.15	0.16	0.17	0.18	0.19	0.48	4.40	5.04	3.42	18.7	
170	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.15	0.15	0.16	0.18	0.18	0.19	0.46	2.04	2.72	1.35	18.7	
180	0.14	0.14	0.14	0.13	0.13	0.12	0.14	0.14	0.16	0.17	0.17	0.18	0.19	0.46	1.05	0.38	0.63	18.7	

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:23DEG
 Operators:
 Test Date:2018-03-26

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 g Test System:EVERFINE G0-2000A_V1 SYSTEM V2.0.402
 Humidity:56%
 Test Distance:10.580m [K=1.0000]
 Remarks: